




ROHS

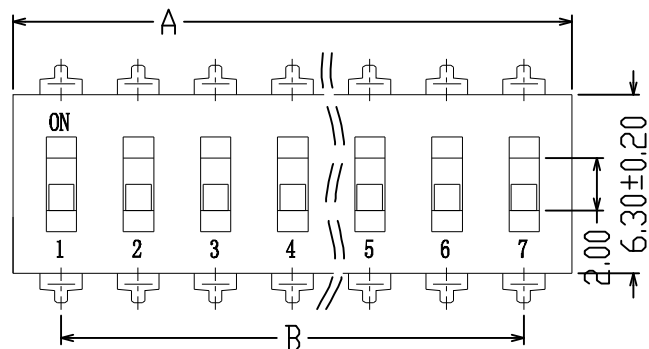


平柄



凸柄

规格:

1. 电器寿命: 2000次
2. 额定电流:
无切换: 100mA 50V DC
切换: 25mA 24V DC
3. 绝缘电阻: 100MΩ 250V DC
4. 接触电阻:
初始值: 50mΩ max
终值: 100mΩ max
5. 绝缘强度: 500V AC 1分钟
6. 适用温度: -20℃~+85℃ (无结冰)
7. 储存温度: -30℃~+85℃

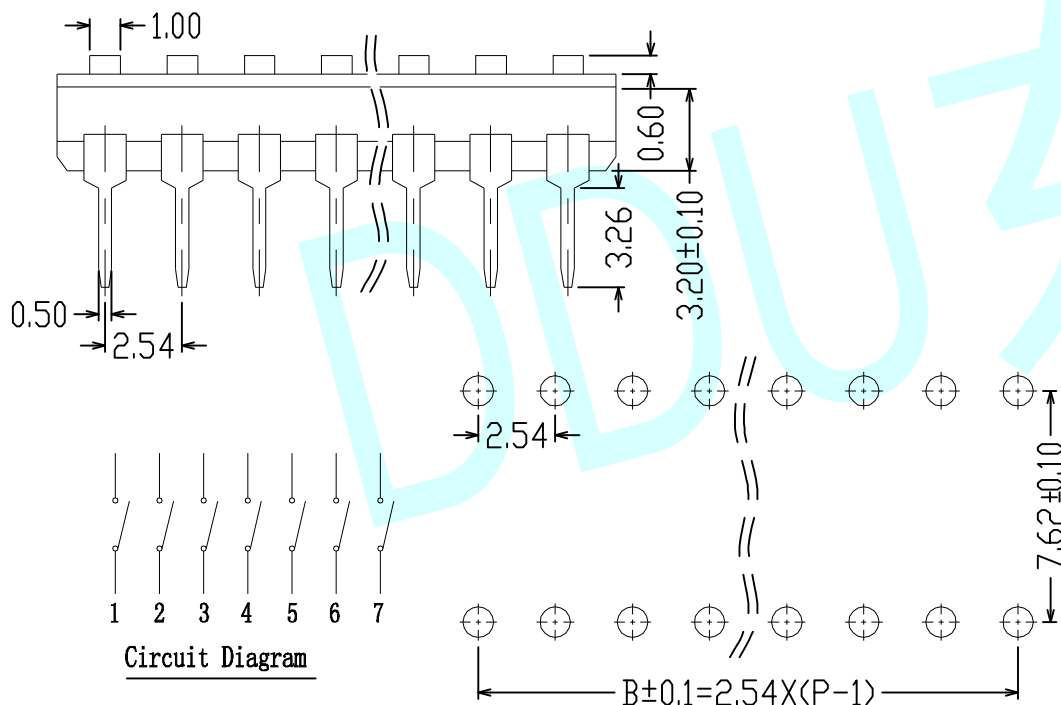

Circuit Diagram

PCB Layout (Pattern Side)

产品特性:

1. 采用高性能UL94V-0耐热阻燃材料
2. 镀金触点保证最低的接触电阻

焊工焊接:

1. 手工焊接: 320℃不超过5秒 (30瓦烙铁max)
2. 波峰焊: 260℃不超过5秒
3. 在焊接和清洁过程中开关必须处于断开状态
4. 焊接后进行清洗需使用表面密封规格的开关
5. 回流焊峰值温度不超过260℃

Position(位数)	1P	2P	3P	4P	5P	6P	7P	8P	9P	10P	12P
DIM. A(长度)	2.54	6.00	8.54	11.08	13.62	16.16	18.70	21.24	23.78	26.32	31.40
DIM. B(脚间距长度)	—	2.54	5.08	7.62	10.16	12.7	15.24	17.78	20.32	22.86	27.94

APPROVALS		DATE	http://www.dongdudz.com		 ® 东都电子 DONGDU ELECTRONICS	
DRAW:	ZRD	2017-12-6	TOLERANCE:	ANGLE:		
CHECKED:	***	****	30≥	±0.30		±2°
			10~30	±0.20		
			5~10	±0.15		
APPOVALS:	***	****	≤5	±0.10		
					MODEL: MULTIFUNCTIONAL SWITCHES	
					PART NO: DDU-2023	
					UNIT :mm SCALE:1:1	
					REV: A PAGE:1/1	