

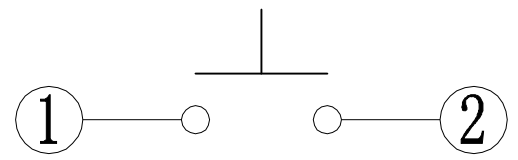
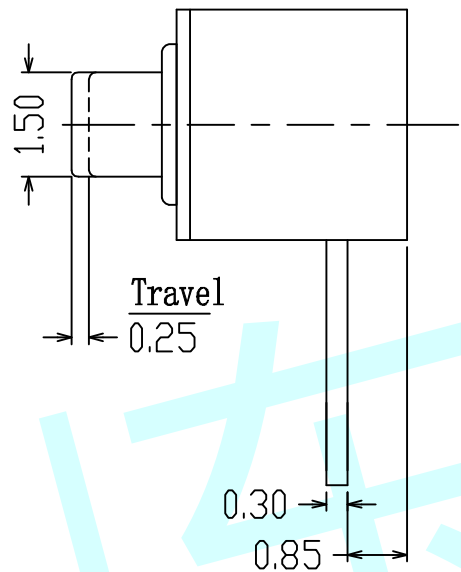


ROHS

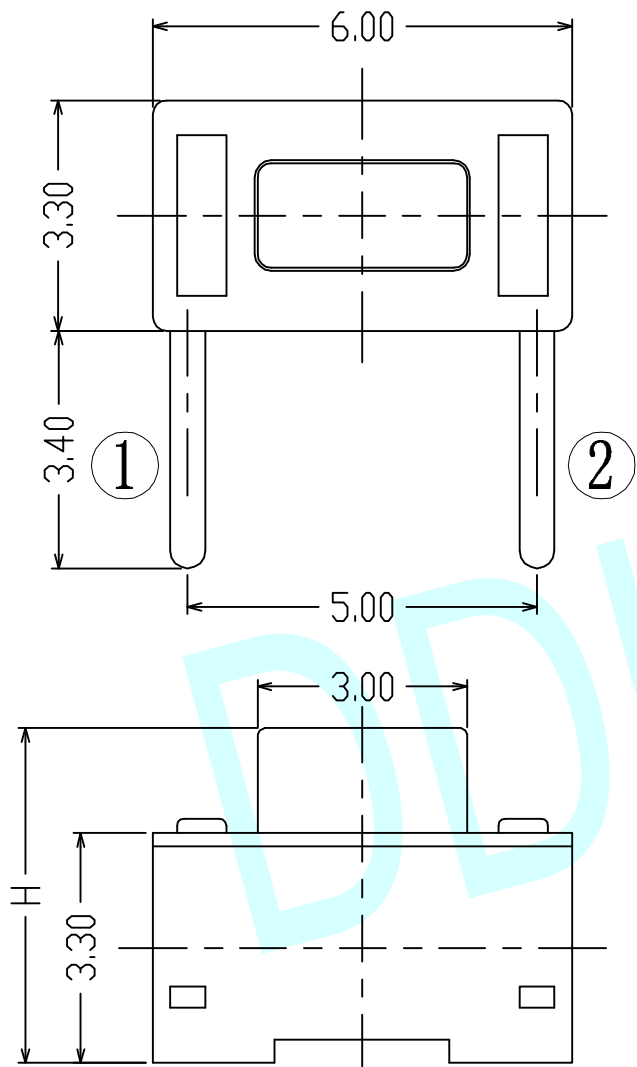



Circuit Diagram

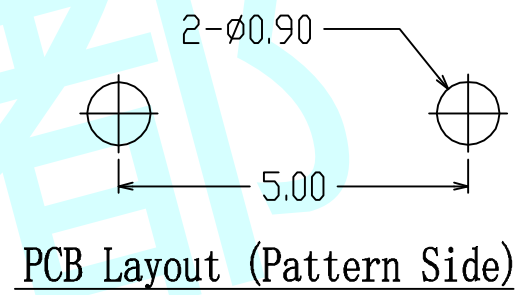

PCB Layout (Pattern Side)

NOTES:

1. Rate voltage. current: 50mA DC 12V
2. Contact resistance: $\leq 100m\Omega$
3. Travel: $0.25 \pm 0.10mm$
4. Insulated resistance: $\geq 100M\Omega$
5. Dielectric strength: $\geq 250V AC/1min$
6. Endurance: 100, 000 cycles

			Stergth		90±30	130±30	180±30	H	4.3	5
APPROVALS			DATE		http://www.dongdudz.com			 ® 东都电子 DONGDU ELECTRONICS		
DRAW:	ZRD	2017-12-6	TOLERANCE:		ANGLE:			MODEL: TACT SWITCHES PART NO: DDU-2028 UNIT :mm SCALE:1:1  REV: A PAGE:1/1		
CHECKED:	***	****	30 \geq	±0.30	±2°					
APPOVALS:	***	****	10°30	±0.20						
			5°10	±0.15						
			≤5	±0.10						