
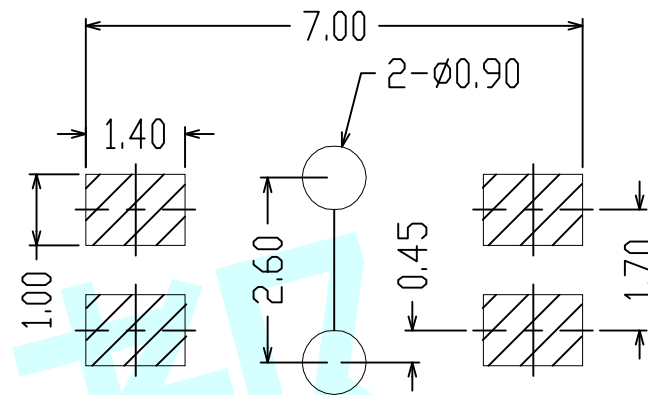
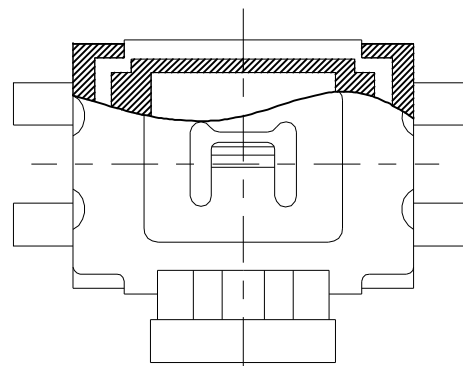





**ROHS**

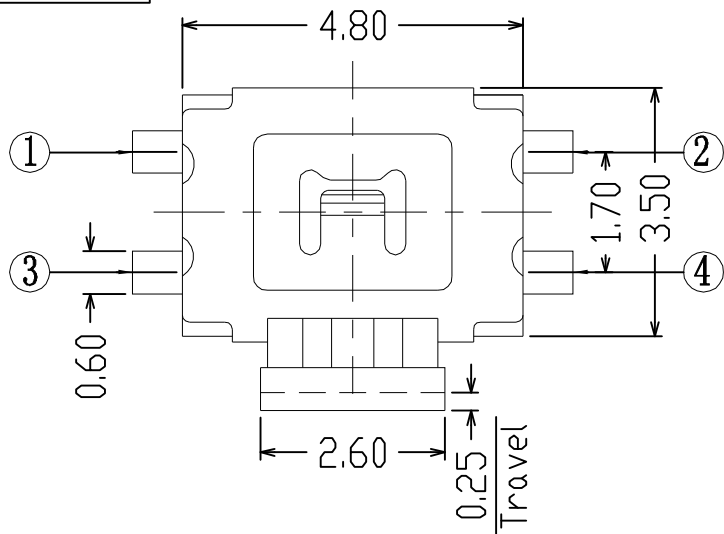

PCB Layout recommended

NOTES:


1. Rate voltage. current: 50mA DC 12V
2. Contact resistance:  $\leq 100m\Omega$
3. Travel:  $0.25 \pm 0.10mm$
4. Insulated resistance:  $\geq 100M\Omega$
5. Dielectric strength:  $\geq 250V AC/1min$
6. Endurance: 100, 000 cycles

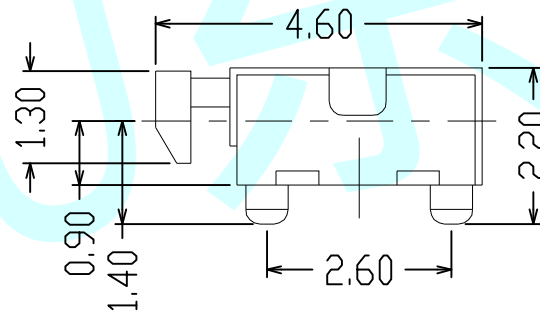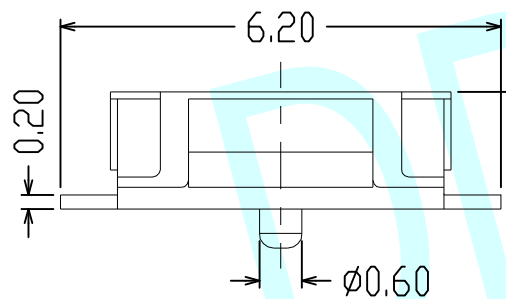


Circuit Diagram

PART NO.

DDU-1175-02



DDU-1175-01



Stergth	90±30	130±30	180±30	250±30
---------	-------	--------	--------	--------

APPROVALS		DATE	http://www.dongdudz.com		
DRAW:	ZRD	2017-12-6	TOLERANCE:	ANGLE:	
CHECKED:	***	****	30°	±0.30	
APPOVALS:	***	****	10°30	±0.20	
			5°10	±0.15	
			≤5	±0.10	
			±2°		
				MODBL:	TACT SWITCHES
				PART NO:	DDU-1175
				UNIT :mm	SCALE: 1:1
			REV:	A	
				PAGE: 1/1	



MODBL:	TACT SWITCHES
PART NO:	DDU-1175
UNIT :mm	SCALE: 1:1
REV:	A
	PAGE: 1/1