

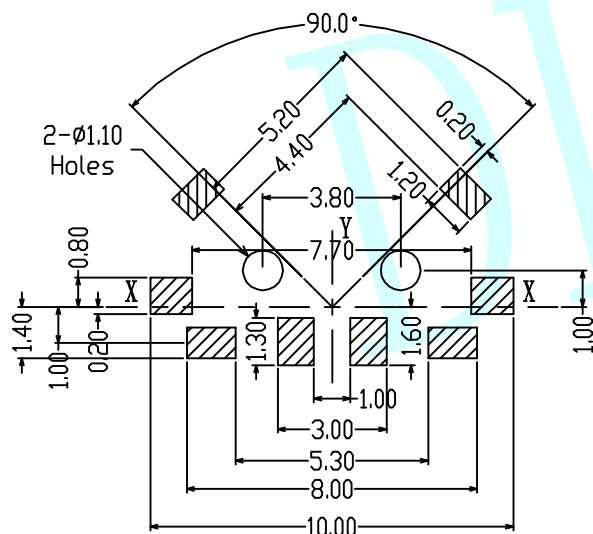
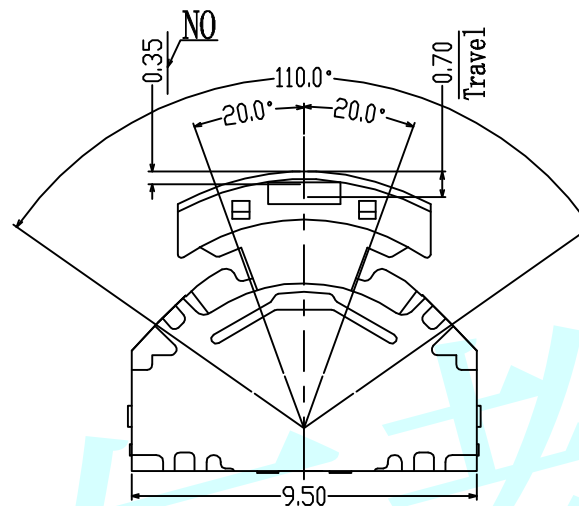
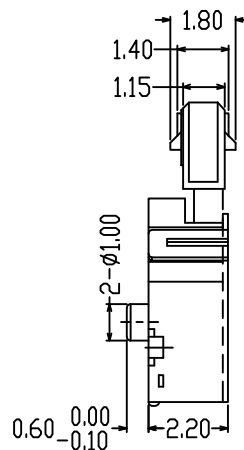


ROHS

CCW  CW
PUSH

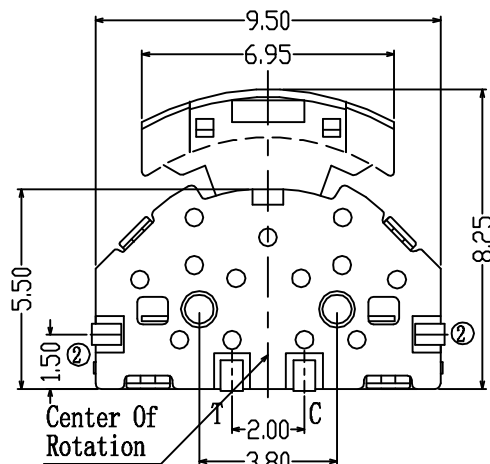

PCB Mounting
Pattern Dimension



0° (NO)

TER	ANG.	(20°)	(15°)	(15°)	(20°)
①					
②					
③					

CCW  CW

CODE TABLE

NOTES:

1. Rating: DC 12V 100mA
2. Contact resistance: 100mΩ MAX
3. Insulation resistance: 100MΩ MIN
4. Service life: 100,000 cycles
5. Operating temperature: -25 °C ~ +85 °C
6. Using humidity: ≤85% RH
7. Operating power: 100/180±50gf

APPROVALS		DATE	http://www.dongdudz.com		 ® 东都电子 DONGDU ELECTRONICS		
DRAW:	ZRD	2017-12-6	TOLERANCE:		ANGLE:		
CHECKED:	***	****	30≥	±0.30	±2°	MODEL:	ROCKER SWITCH
			10~30	±0.20		PART NO:	DDU-1208
			5~10	±0.15		UNIT :mm	SCALE:1:1
			≤5	±0.10		REV:	A
APPROVALS:	***	****					