


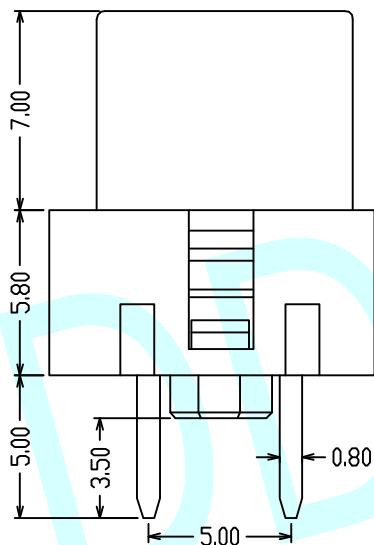
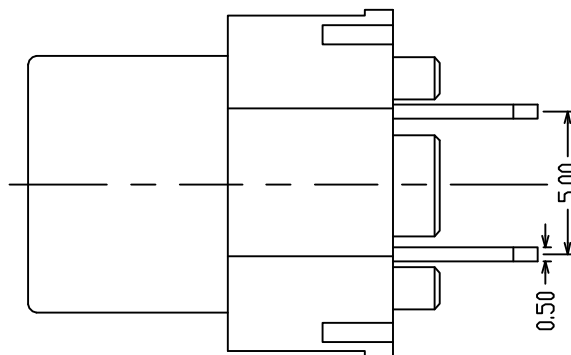


ROHS

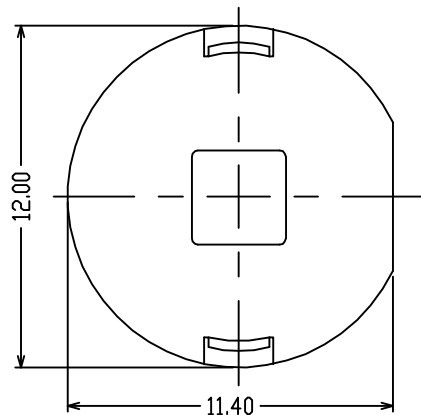


Circuit Diagram



PCB Layout (Pattern Side)

NOTES:

1. Rating:12V DC 50mA
2. Contact Resistance:100mΩ Max
3. Insulation Resistance:250V DC FOR 1MIN
4. Dielectric Strength:250V AC(50/60HZ) FOR 1MIN
5. Life test:100,000 CYCLES
6. Operation Force:160±50g
7. Travel:0.25±0.1mm

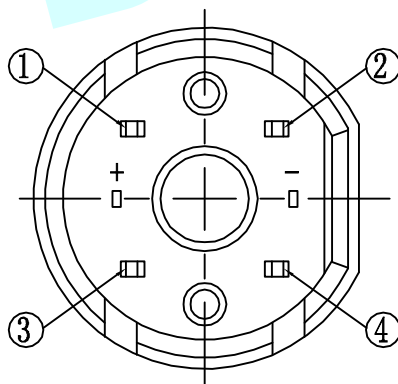

APPROVALS		DATE	http://www.dongdudz.com	
DRAW:	ZRD	2017-12-6	TOLERANCE:	ANGLE:
CHECKED:	***	****	30≥ ±0.30	±2°
APPOVALS:	***	****	10~30 ±0.20	
			5~10 ±0.15	
			≤5 ±0.10	



MODEL:	LED Tact Switch	
PART NO:	DDU-1549	
UNIT :mm	SCALE:1:1	✎
REV:	A	PAGE:1/1