


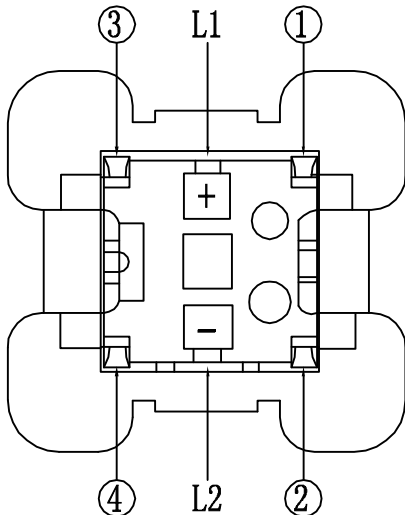



ROHS

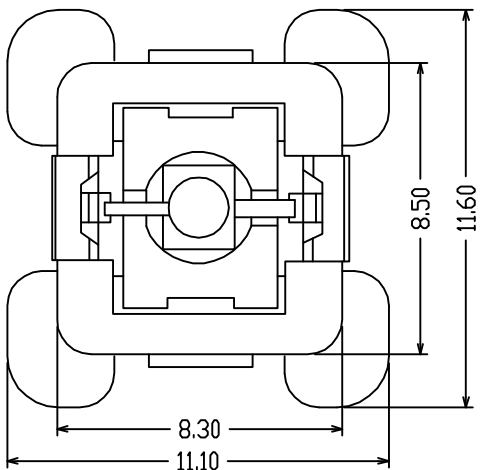

Circuit Diagram

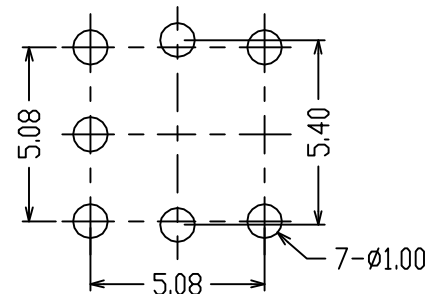

PCB Layout (Pattern Side)

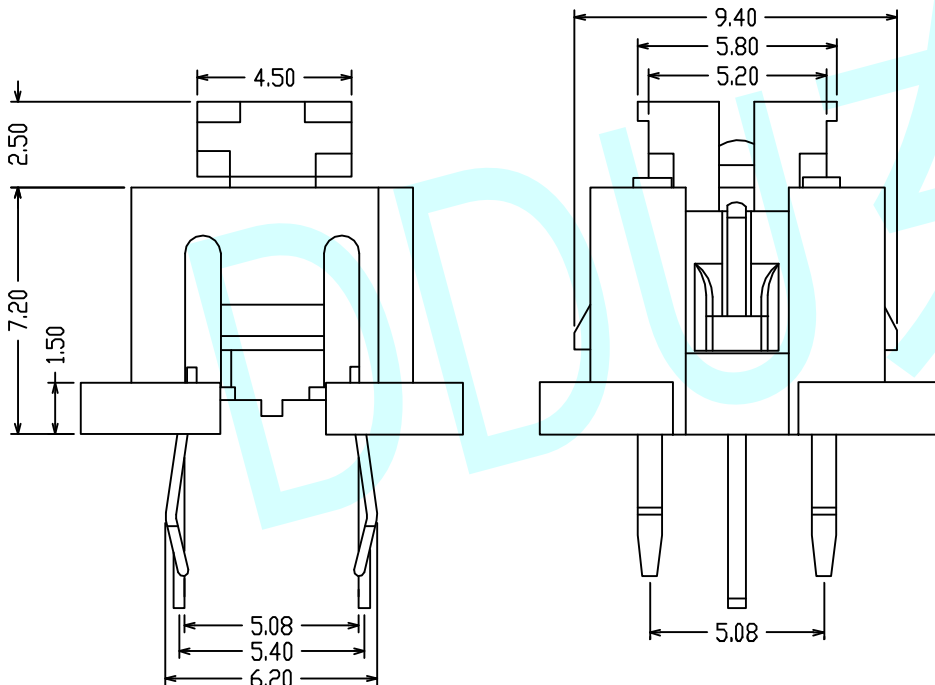

NOTES:

1. Rating: 12V DC 50mA
2. Contact Resistance: 100mΩ Max
3. Insulation Resistance: 100MΩ 250V DC FOR 1MIN
4. Dielectric Strength: 250V AC (50/60Hz) FOR 1MIN
5. Life Test: 100,000 Cycles
6. Operation Force: 160±50gf/250±50gf
7. Travel: 0.25±0.10mm
8. Operating temperature range: -20℃~+70℃

LED Colour (LED颜色)		Whiler (白色)	Full Green (翠绿)	Amber (琥珀色)	
		Red (红色)	Yellow (黄色)	Green (绿色)	Blue (蓝色)
APPROVALS		DATE		http://www.dongdudz.com	
DRAW:	ZRD	2017-12-6		TOLERANCE:	ANGLE:
CHECKED:	***	****		30≥	±0.30
APPOVALS:	***	****		10~30	±0.20
				5~10	±0.15
				≤5	±0.10
				±2°	
				 ® 东都电子 DONGDU ELECTRONICS	
				MODEL:	LED Tact Switch
				PART NO:	DDU-1516
				UNIT :mm	SCALE: 1:1
				REV:	A
				PAGE: 1/1	