

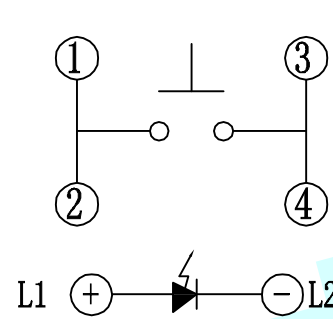
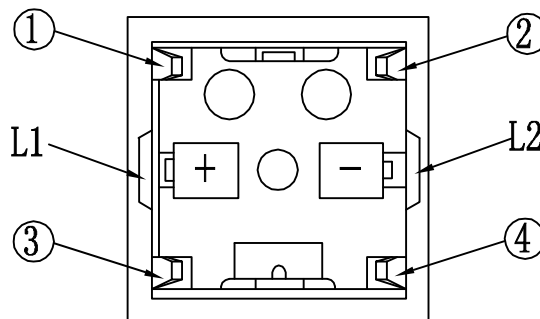




ROHS

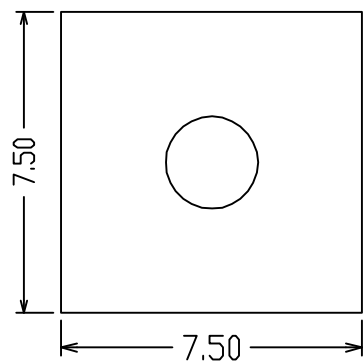

Circuit Diagram

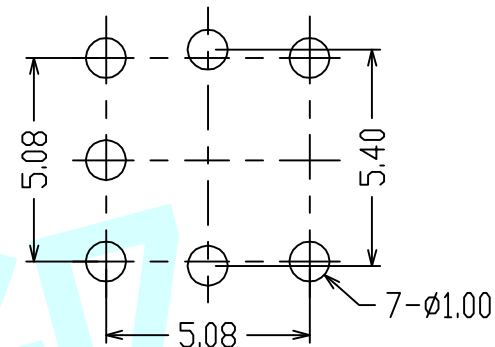

PCB Layout (Pattern Side)

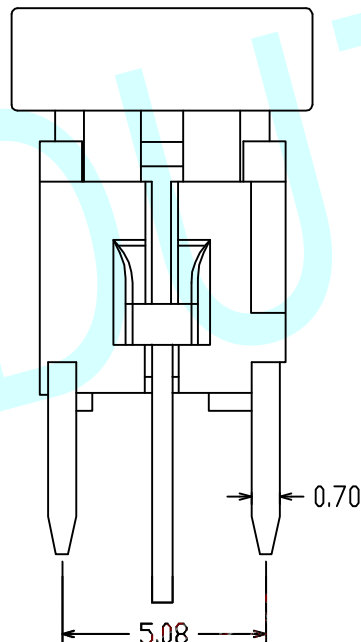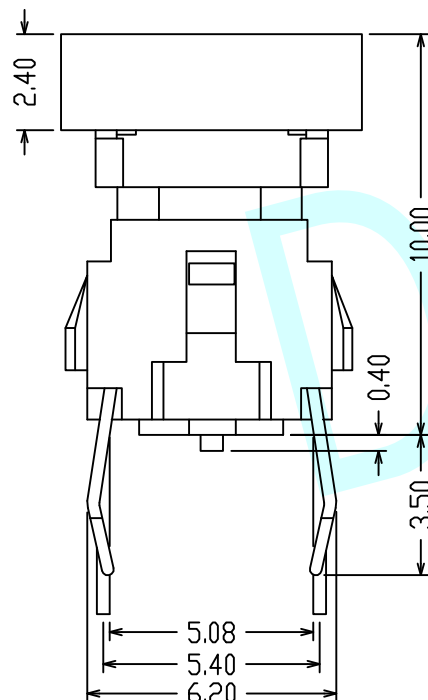

NOTES:

1. Rating: 12V DC 50mA
2. Contact Resistance: 100mΩ Max
3. Insulation Resistance: 100MΩ 250V DC FOR 1MIN
4. Dielectric Strength: 250V AC (50/60Hz) FOR 1MIN
5. Life Test: 100,000 Cycles
6. Operation Force: 160±50gf/250±50gf
7. Travel: 0.25±0.10mm
8. Operating temperature range: -20℃~+70℃

LED Colour(LED颜色)		Whiler(白色)	Red(红色)		Blue(蓝色)	Green(绿色)	
APPROVALS		DATE	http://www.dongdudz.com				
DRAW:	ZRD	2017-12-6	TOLERANCE:		ANGLE:		
CHECKED:	***	****	30≥	±0.30	±2°		
			10~30	±0.20			
			5~10	±0.15			
APPOVALS:	***	****	≤5	±0.10			
						® 东都电子	
						DONGDU ELECTRONICS	
MODEL:		LED Tact Switch					
PART NO:		DDU-1510					
UNIT :mm		SCALE:1:1					
REV:		A		PAGE:1/1			