
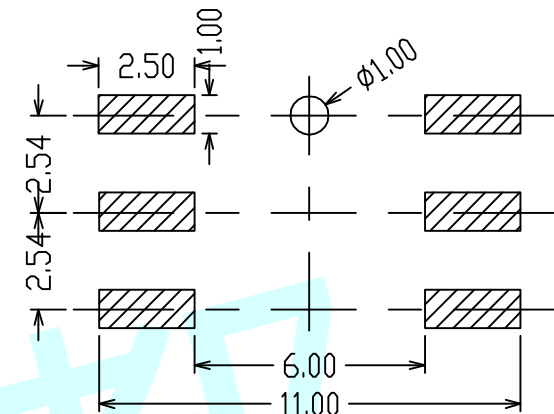
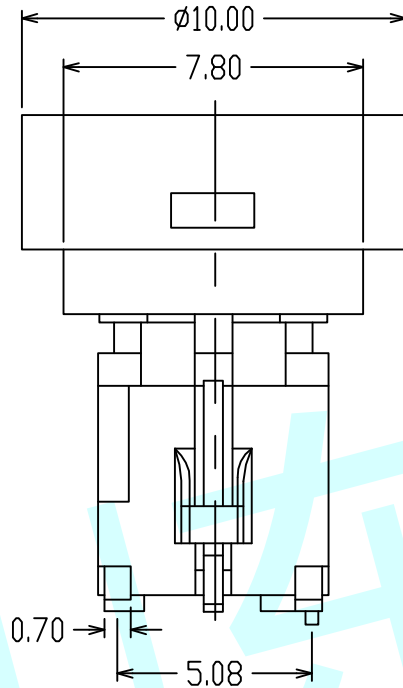



ROHS

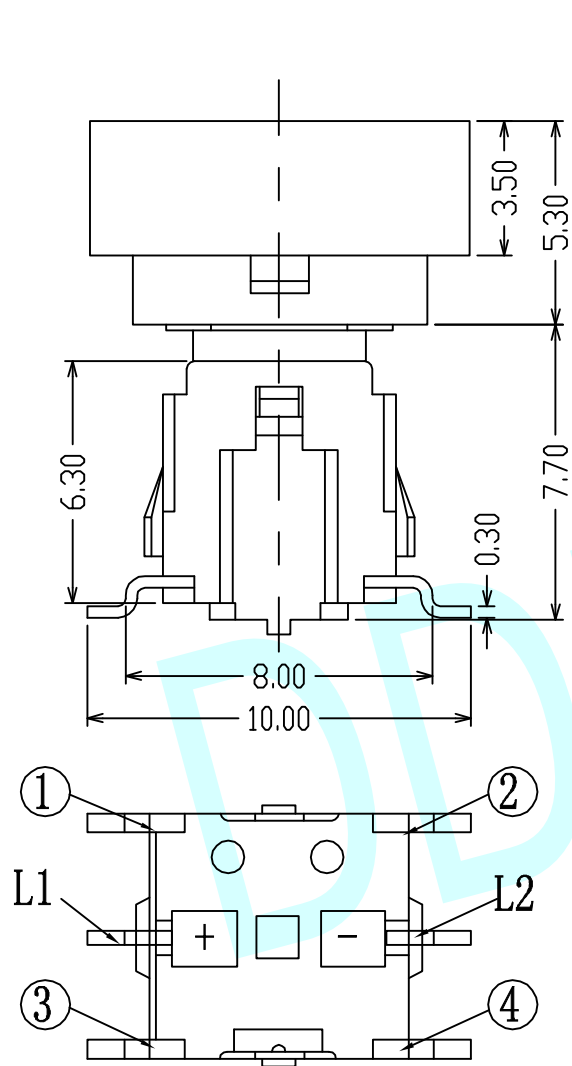

PCB Layout (Pattern Side)

NOTES:

1. Rating: 12V DC 50mA
2. Contact Resistance: 100m Ω Max
3. Insulation Resistance: 100M Ω 250V DC FOR 1MIN
4. Dielectric Strength: 250V AC (50/60Hz) FOR 1MIN
5. Life Test: 200,000 Cycles
6. Operation Force & Travel: SEE



Circuit Diagram

LED Colour									
R	Y	G	B	W	PG	RY	RG	RB	
Red	Yellow	Green	Blue	White	Pure Green	Red Yellow	Red Green	Red Blue	

6	COVER	ABS&pc
5	TERMINAL	Bronze Silver Plated
4	CONTACT	SUS
3	LED	GaAsP/GaP
2	BUTTON	PA66
1	HOUSING	PA66
ITEM	PART NAME	MATERIAL

APPROVALS		DATE	http://www.dongdudz.com	
DRAW:	ZRD	2017-12-6	TOLERANCE:	ANGLE:
CHECKED:	***	****	30 \geq	± 0.30
APPROVALS:	***	****	10 \sim 30	± 0.20
			5 \sim 10	± 0.15
			≤ 5	± 0.10

东都电子
DONGDU ELECTRONICS

MODL: LED Tact Switch
PART NO: DDU-1506
UNIT :mm SCALE: 1:1
REV: A



PAGE: 1/1