

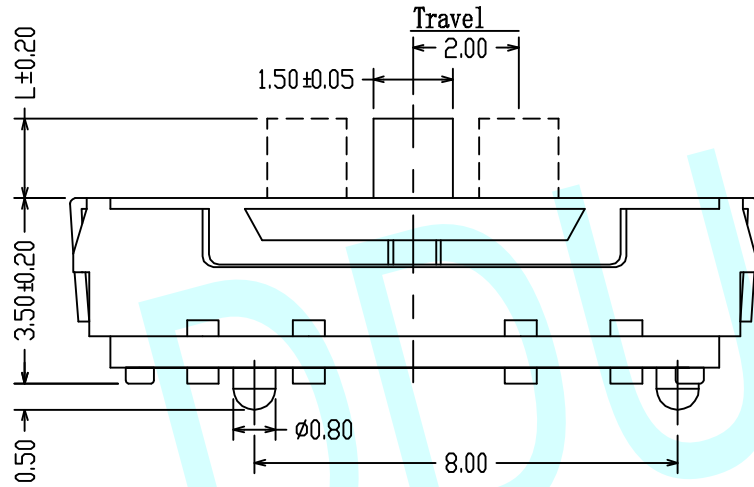
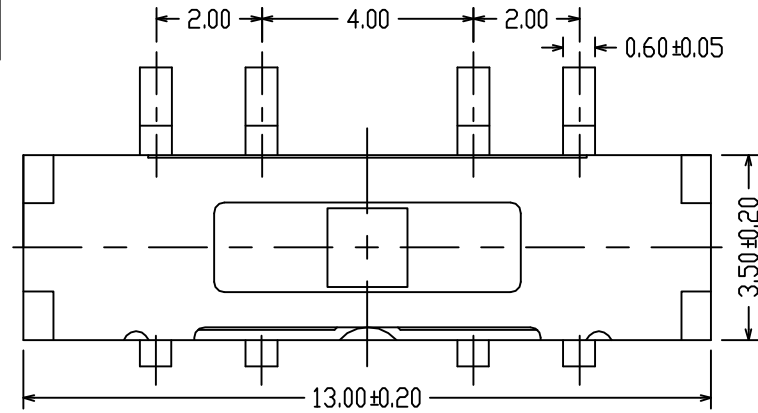
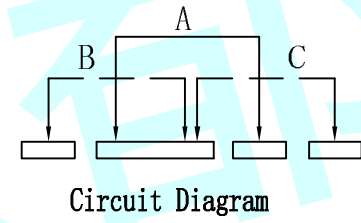


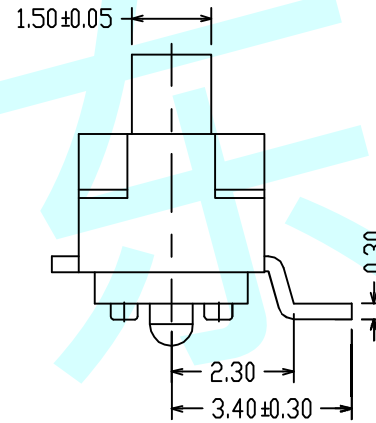

ROHS

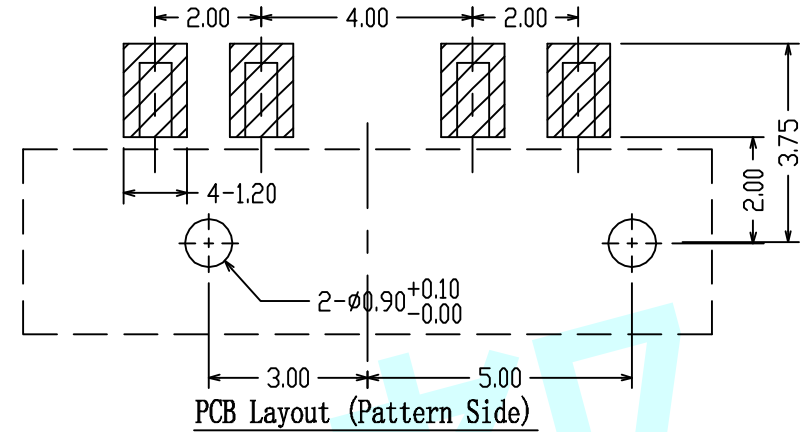

NOTES:

1. Rating:DC 6V 300mA
2. Contact Resistance: $\leq 50m\Omega$
3. Insulation Resistance: $\geq 100M\Omega$
4. Withstand voltage:AC 500V 1 Minute
5. Electrical Life:10,000Cycles above(Load)
6. Mechanical Life:10,000Cycles(NO Load)
7. Operating force range:250gf \pm 100gf
8. Operating temperature range:-25 $^{\circ}$ C+80 $^{\circ}$ C
9. Ambient humidity used: $\leq 85\%RH$
10. Solder ability: 245 $^{\circ}$ C \pm 50 $^{\circ}$ C, 3S \pm 0.5S
11. Withstand Soldering temperature: 260 $^{\circ}$ C \pm 5 $^{\circ}$ C, 3S \pm 1S



		L	2.00	3.00	4.00
APPROVALS		DATE	http://www.dongdudz.com		 <p>® 东都电子 DONGDU ELECTRONICS</p>
DRAW:	ZRD	2017-12-6	TOLERANCE:	ANGLE:	
CHECKED:	***	***	30 \geq	± 0.30	
APPOVALS:	***	***	10 $^{\circ}$ 30	± 0.20	
			5 $^{\circ}$ 10	± 0.15	
			≤ 5	± 0.10	
MODEL:	TOGGLE SWITCHES				
PART NO:	DDU-1438S				
UNIT :mm	SCALE:1:1				
REV:	A	PAGE:1/1			