
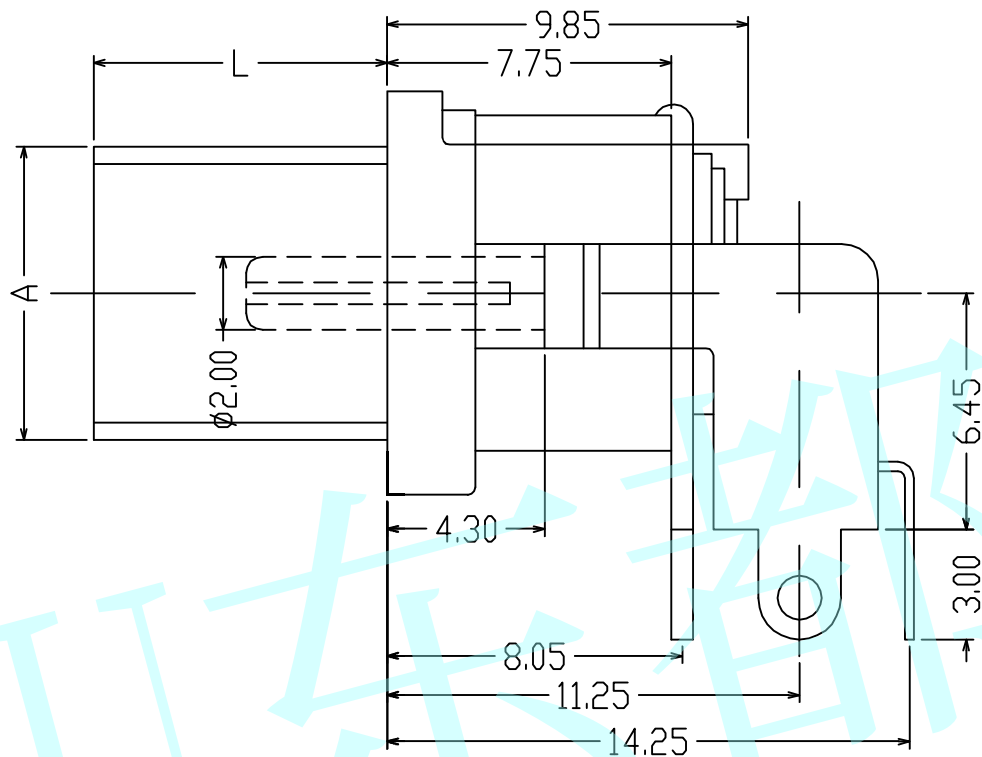


ROHS

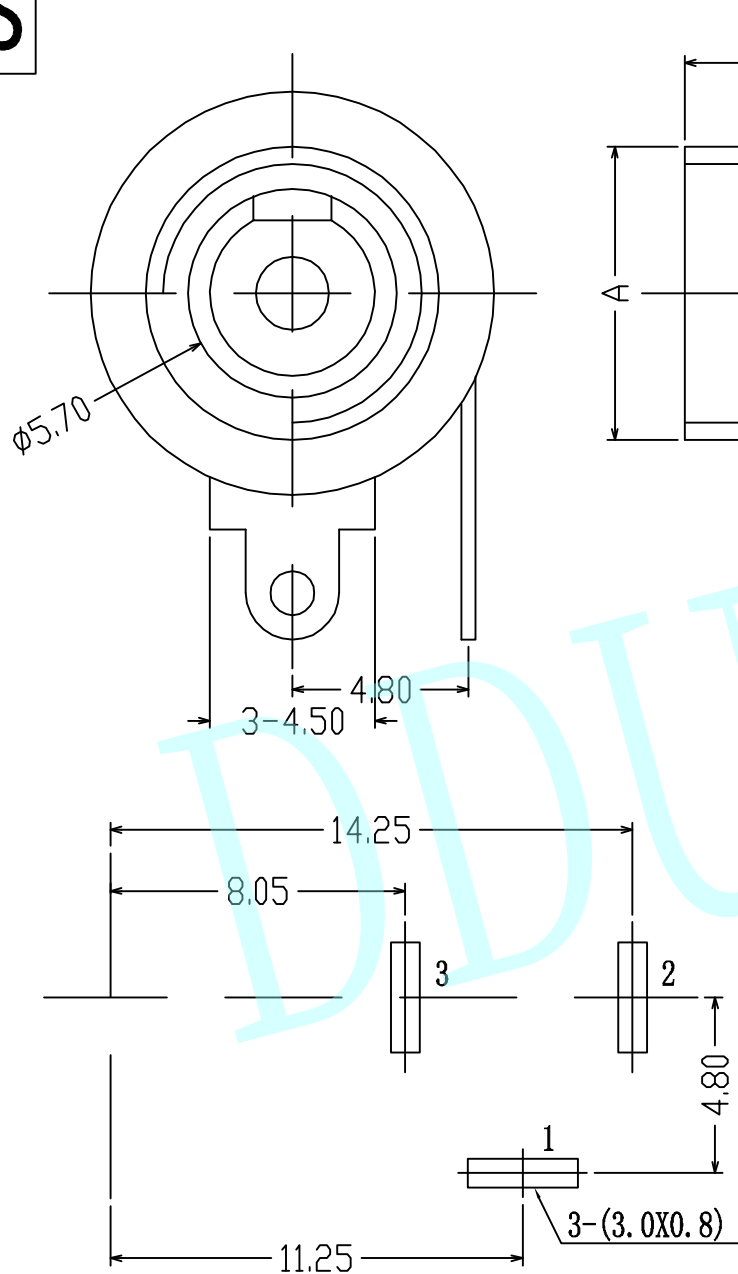

A=8.00	L=5.70
A=M8XP0.75	L=5.70
A=8.00	L=8.00
A=M8XP0.75	L=8.00

CIRCUIT DIAGRAM

NOTES:

1. Rating: 0.5A 30V DC
2. Contact Resistance: 100mΩ Max
3. Operating temperature: -20℃~70℃
4. Operating force: 3-20N
5. Operating Life: 5,000 cycles

APPROVALS		DATE	http://www.dongdudz.com		 ® 东都电子 DONGDU ELECTRONICS	
DRAW:	ZRD	2017-12-6	TOLERANCE:		ANGLE:	 ® 东都电子 DONGDU ELECTRONICS
CHECKED:	***	***	30≥	±0.30	±2°	
			10~30	±0.20		
			5~10	±0.15		
APPROVALS:	***	***	≤5	±0.10		
MODEL:		DC POWER JACK				
PART NO:		DC-093				
UNIT :mm		SCALE:1:1				
REV:		A		PAGE:1/1		