

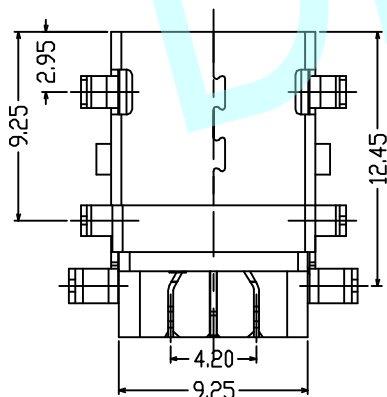
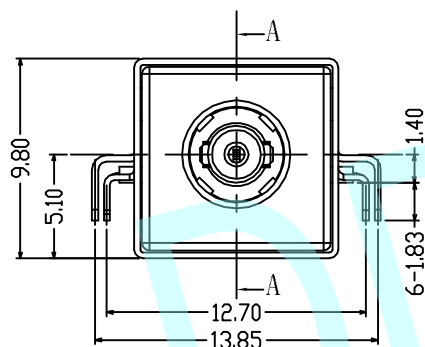



ROHS

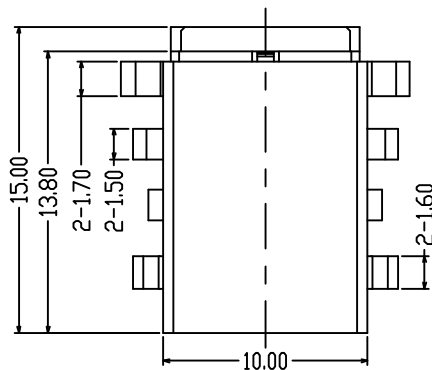

无齿

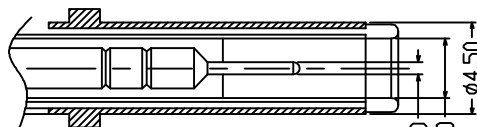

MATING PLUG : OD ϕ 4.50, ID ϕ 0.60
REFERENCE




NOTES:

A. Electrical Characteristics :

1. Rating : 20V 7A Min.
2. Contact Resistance:
50 Milliohms Max. For Initial,
80 Milliohms Max. After 5000 Cycles.
3. Insulation Resistance : 100M Ω Min.
BY 500V DC After 1 Minute.
4. Dielectric Withstanding Voltage : 500V
Rms After 1 Minute.


B. Mechanical Characteristics :

1. Insertion Force : 0.3~3.0 KGF (2.94~29.4N)
2. Withdrawal Force : 0.3~3.0 KGF (2.94~29.4N)
3. Lifef Tfst. 5000 Cycles Min.

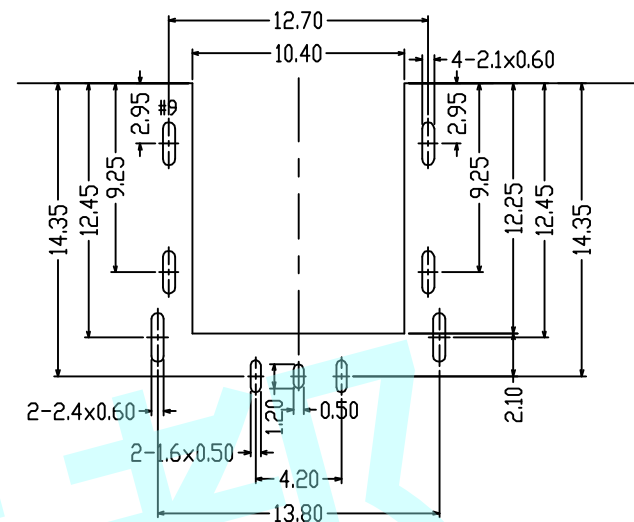


T:1.6 Dimensions Of PC Board Holes

Tolerance : ± 0.1 (Printed-Top View)

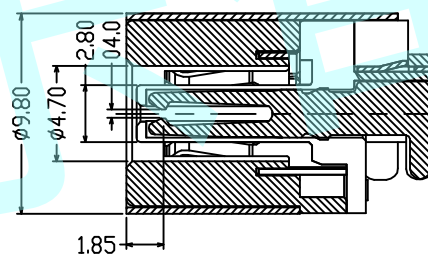

A-A



CIRCUIT DIAGRAM

APPROVALS		DATE	http://www.dongdudz.com	
DRAW:	ZRD	2017-12-6	TOLERANCE:	ANGLE:
CHECKED:	***	***	30 $\geq$	± 0.30
APPOVALS:	***	***	10 $\sim$ 30	± 0.20
			5 $\sim$ 10	± 0.15
			≤ 5	± 0.10

MODBL:		DC POWER JACK	
PART NO:		DC-094	
UNIT :mm	SCALE:1:1		
REV:	A	PAGE:1/1	