

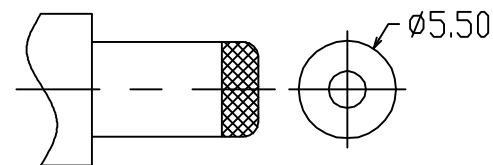
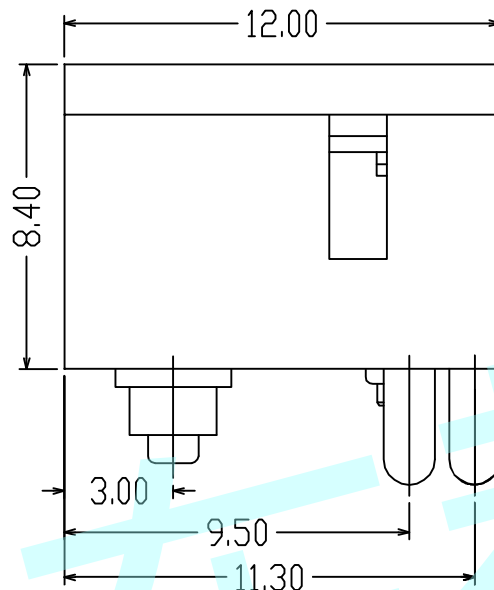


ROHS

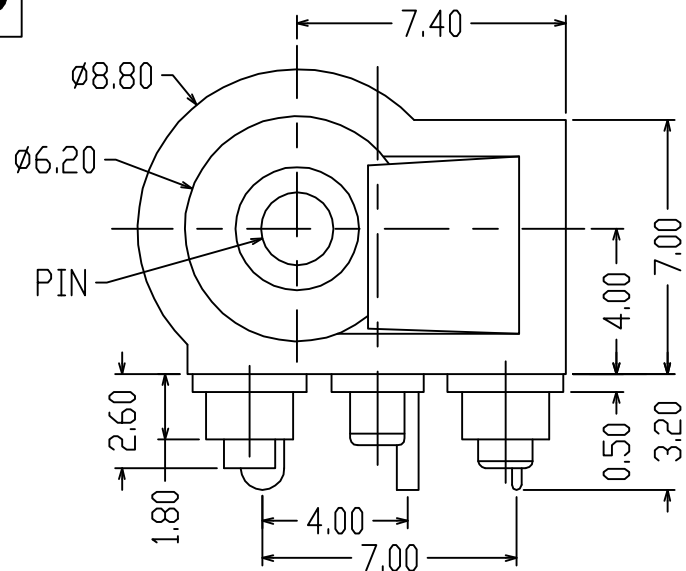

DC MATE PLUG

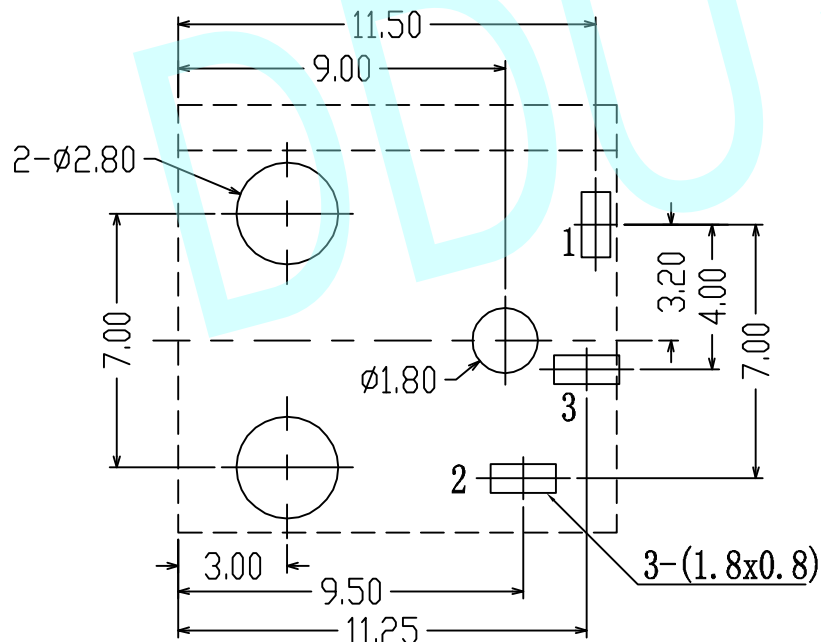


PCB Layout (Copper-Side View)

NOTES:


1. Rating: DC 0.5A 30V
2. Contact Resistance: 100mΩ Max
3. Operating temperature: -20°C ~ 70°C
4. Operating force: 3-20N
5. Operating Life: 5,000 cycles

DC-004A-A



CIRCUIT DIAGRAM

DC-004A-B



CIRCUIT DIAGRAM

			PIN		ø2.00		ø2.50	
APPROVALS		DATE		http://www.dongdudz.com				
DRAW:	ZRD	2017-12-6		TOLERANCE:		ANGLE:		
CHECKED:	***	***		30≥	±0.30	±2°		
APPROVALS:	***	***	10~30	±0.20				
			5~10	±0.15				
			≤5	±0.10				
						 ® 东都电子 DONGDU ELECTRONICS		
				MODEL:		DC POWER JACK		
				PART NO:		DC-004A		
				UNIT :mm		SCALE:1:1		
				REV:		A		PAGE:1/1