
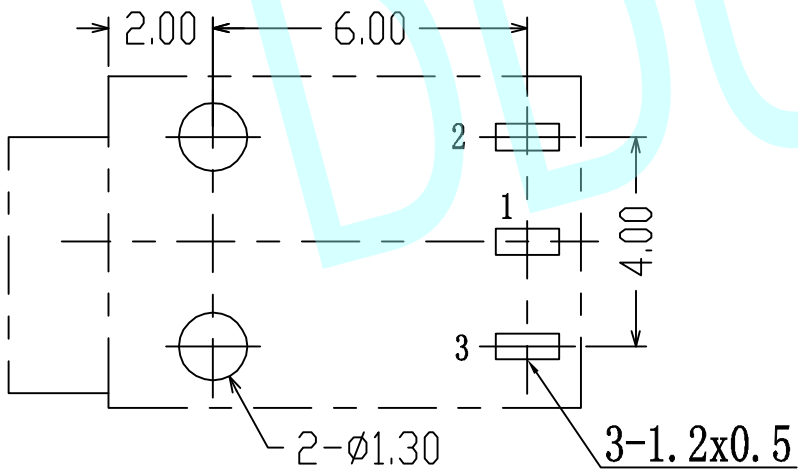
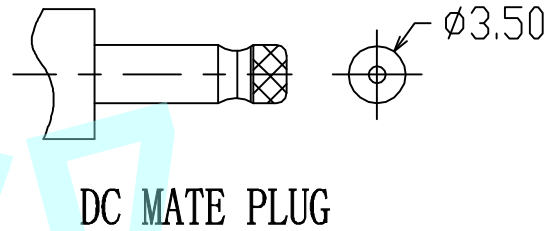
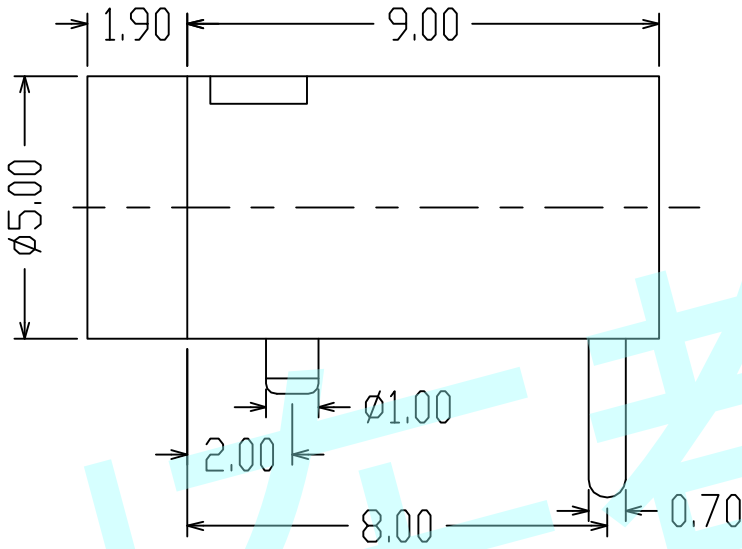




ROHS

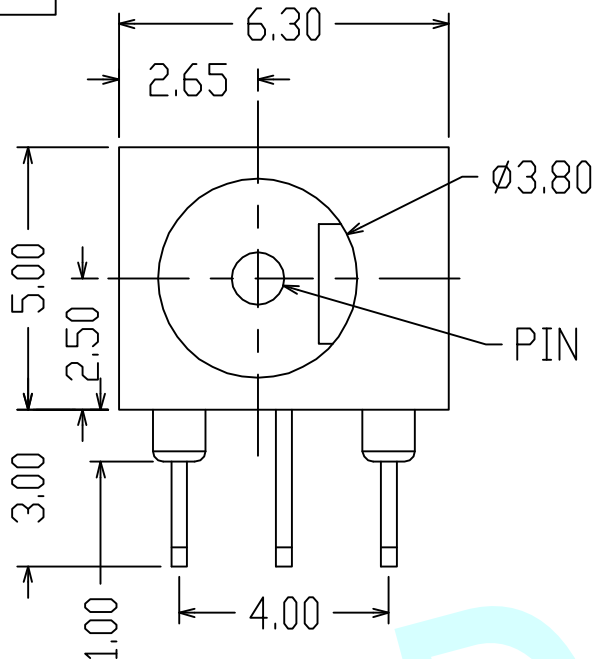

PCB LAYOUT (Copper-side view)

NOTES:

1. Rating: DC 0.5A 30V
2. Contact Resistance: 100mΩ Max
3. Operating temperature: -20°C ~ 70°C
4. Operating force: 3-20N
5. Operating Life: 5,000 cycles

		PIN		Ø1.00		Ø1.30			
APPROVALS		DATE		http://www.dongdudz.com		 ® 东都电子 DONGDU ELECTRONICS MODEL: DC POWER JACK PART NO: DC-003A UNIT :mm SCALE:1:1  REV: A PAGE:1/1			
DRAW:	ZRD	2017-12-6		TOLERANCE:				ANGLE:	
CHECKED:	***	***		30≥	±0.30			±2°	
APPOVALS:	***	***		10~30	±0.20				
				5~10	±0.15				
				≤5	±0.10				