

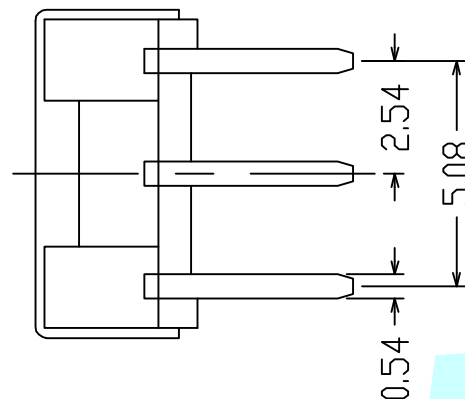
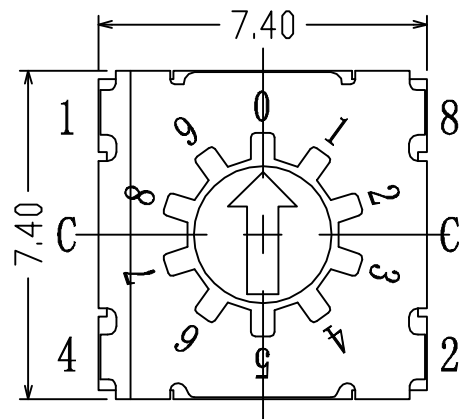


ROHS

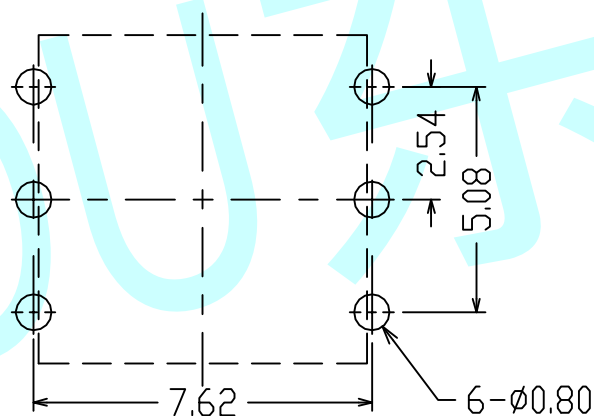

NOTES:

1. None-switching: 400mA 42V
2. Switching: 150mA 42V
3. Contact resistance: 80mΩ max
4. Insulation resistance: 100MΩ min (DC 250V 1minute ±5S)
5. Operating force: 120gf ±30gf
6. Life cycles: 25,000 steps
7. Operating/storage temperature: -40℃ ~ +85℃

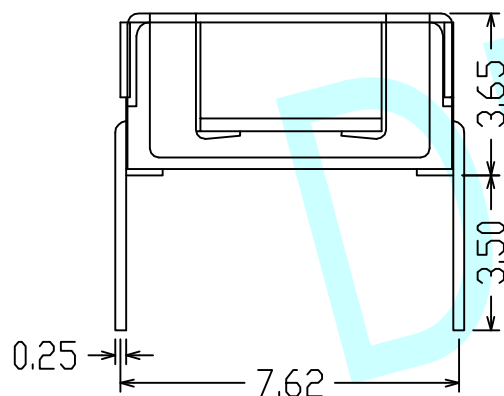

PCB LAYOUT

Real Code

Position		C	1	2	4	8
	0	●				
	1	●	●			
	2	●		●		
	3	●	●	●		
	4	●			●	
	5	●	●		●	
	6	●		●	●	
	7	●	●	●	●	
	8	●				●
	9	●	●			●

APPROVALS		DATE	http://www.dongdudz.com		 ® 东都电子 DONGDU ELECTRONIC	
DRAW:	ZRD	2017-12-6	TOLERANCE:			ANGLE: ±2°
CHECKED:	***	****	30≥	±0.30		
			10~30	±0.20		
			5~10	±0.15		
APPROVALS:	***	****	≤5	±0.10		
MODEL:		DIP SWITCH				
PART NO:		DDU-KR-10				
UNIT :mm		SCALE:1:1				
REV:		A		PAGE:1/1		