

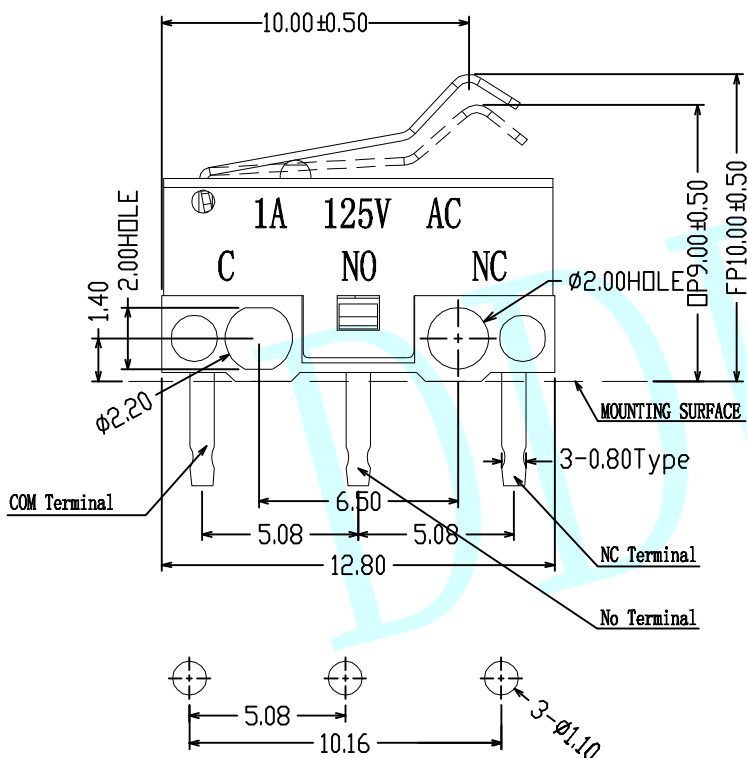
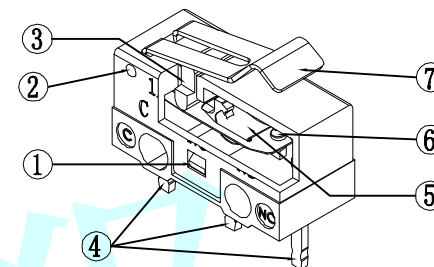

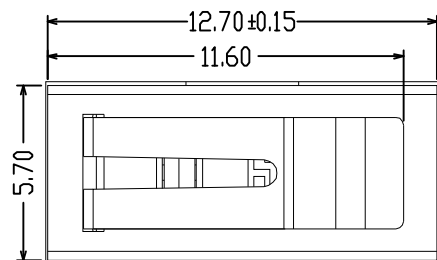


ROHS



PCB Layout (Pattern Side)

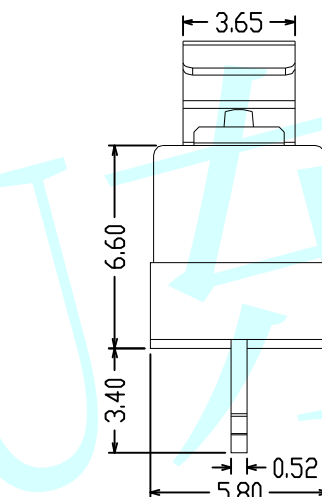

Circuit Diagram

NOTE:

1. Rated voltage: AC 125V 1A/DC 30V 0.1A
2. Contact impedance: $50m\Omega$ MAX
3. Insulation resistance: $100M\Omega$ min
4. High pressure resistance: AC 500V(50~60Hz)/1minute
5. Operating force: $20gf \pm 10gf$
6. Release force: 10gf min

7	Pressing handle	1	SUS	
6	Silver dot	1	Silver alloy	
5	Shrapnel	1	Copper alloy	
4	Terminal a/b/c	3	BRASS	Plate with silver
3	Guide core	1	POM	WHITE
2	LID	1	PBT	BLACK
1	BASE	1	PBT	WHITE
NO.	ENTRY NAME	Q' TY	Material	REMARKS

APPROVALS		DATE		http://www.dongdudz.com		 东都电子 DONGDU ELECTRONICS		
DRAW:	ZRD	2017-12-6	TOLERANCE:		ANGLE:	MODEL: MICRO SWITCHS PART NO: DDU-1704 UNIT :mm SCALE:1:1  REV: A PAGE:1/1		
CHECKED:	***	****	30≥	±0.30	±2°			
			10~30	±0.20				
			5~10	±0.15				
APPROVALS:	***	****	≤5	±0.10				