

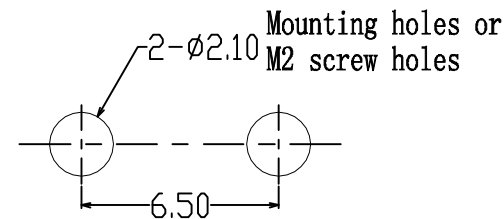



ROHS

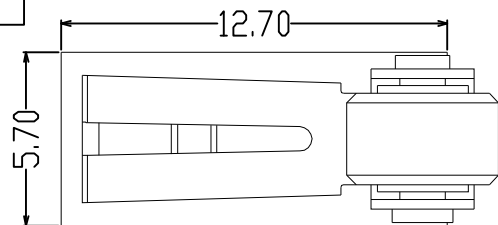



Mounting hole size

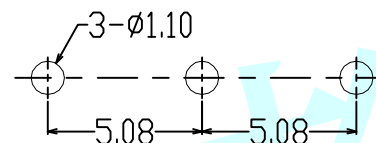

PCB LAYOUT

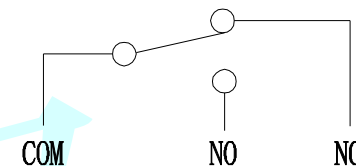

CONTACT CONFIGURATION

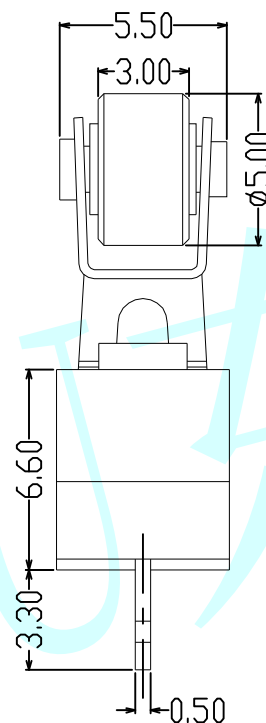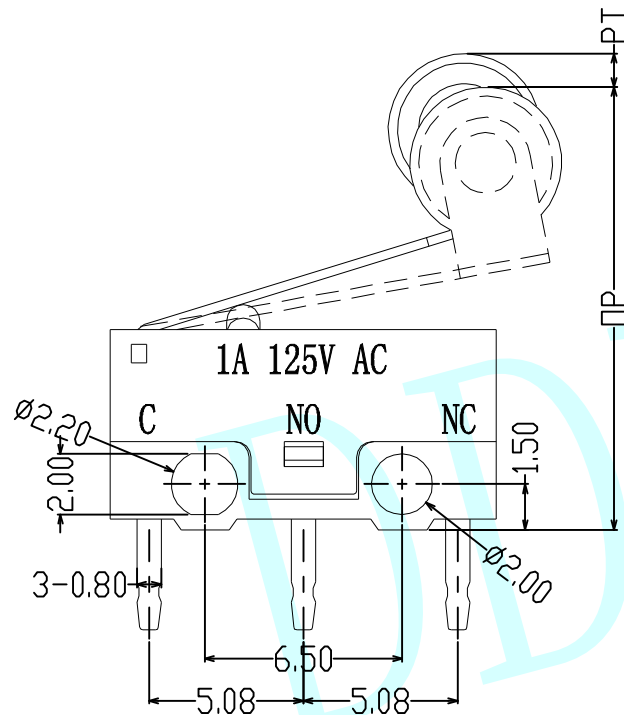

NOTES:

A. Electrical characteristics:

1. Rating: 1A 125V AC
2. Contact resistance: 100mΩ max (Initial)
3. Insulation Resistance: 100MΩ min (at 125V DC)
4. Dielectrical strength: AC 250V (50/60Hz for 1 minute)

B. Mechanical characteristics:

1. Operating force (OF): 100g max
2. Pre-travel (PT): 2.0mm max
3. Operating position (OP): 14.0 ± 1.0mm
4. Electrically life: 30,000 cycles min
5. Operating temperature: -20°C ~ +70°C

NO.	PART NAME	MATERIAL	Q'TY	FINISHING
1	NC TERMINAL	BRASS	1	Ag PLATED
2	NO TERMINAL	BRASS	1	Ag PLATED
3	COM TERMINAL	BRASS	1	Ag PLATED
4	BASE	PA	1	WHITE
5	COVER	PBT	1	BLACK
6	BUTTON	POM	1	
7	SPRING	BERYLLIUM COPPER	1	
8	MOVABLE CONTACT	SILVER ALLOY	1	
9	AXIS	AL	1	
10	WHEEL	PBT	1	
11	LEVER	SUS301	1	

APPROVALS		DATE		http://www.dongdudz.com	
DRAW:	ZRD	2017-12-6	TOLERANCE:		ANGLE:
CHECKED:	***	****	30≥	±0.30	±2°
			10~30	±0.20	
			5~10	±0.15	
			≤5	±0.10	
APPROVALS:	***	****			



® 东都电子

DONGDU ELECTRONICS

MODEL:	MICRO SWITCHS	
PART NO:	DDU-1715-H	
UNIT :mm	SCALE:1:1	
REV:	A	PAGE:1/1