

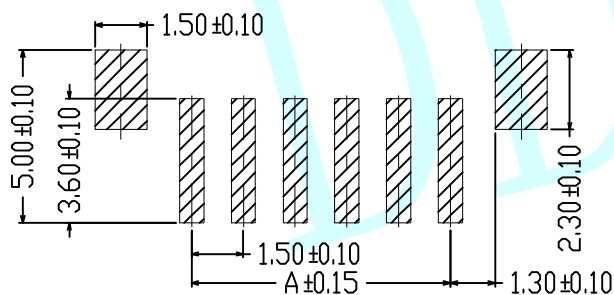

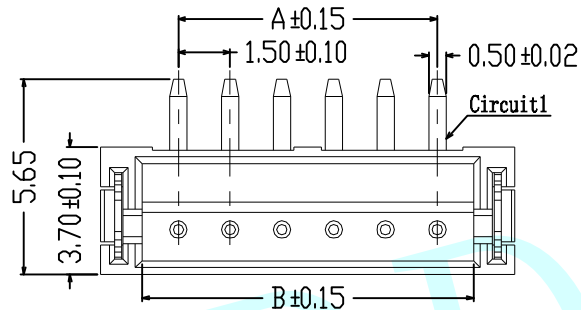

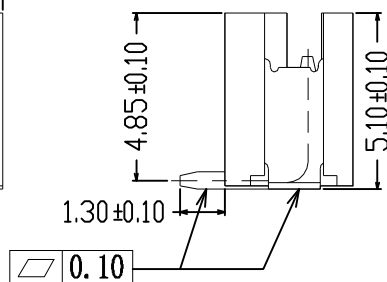


ROHS

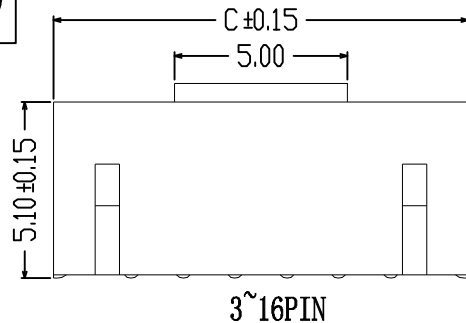

SUGGESTED PCB LAYOUT
(COMPONENT SIDE)

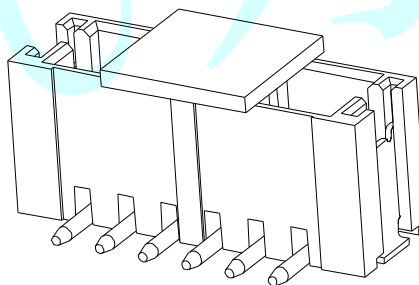

SPECIFICATION:

1. Contact resistance: $\leq 20\text{m}\Omega$
2. Insulation resistance: $\geq 500\text{M}\Omega$
3. Rated current: 50V AC/DC
4. Rated current: 1.0A AC/DC
5. Withstand voltage: 500V AC/minute
6. Temperature range: $-25^{\circ}\text{C} \sim +105^{\circ}\text{C}$

ORDER INFORMATION:

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2	1.50	3.60	6.00	10	13.50	15.60	18.00
3	3.00	5.10	7.50	11	15.00	17.10	19.50
4	4.50	6.60	9.00	12	16.50	18.60	21.00
5	6.00	8.10	10.50	13	18.00	20.10	22.50
6	7.50	9.60	12.00	14	19.50	21.60	24.00
7	9.00	11.10	13.50	15	21.00	23.10	25.50
8	10.50	12.60	15.00	16	22.50	24.60	27.00
9	12.00	14.10	16.50				

④	Cap	1	LCP (UL94V-0)	Beige
③	Solder Tabs	2	Phosphor Bronze	Tin-plated
②	Contacts	2~16	Brass	Tin-plated
①	Insulator	1	LCP (UL94V-0)	Beige
NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR

APPROVALS		DATE	http://www.dongdudz.com		
DRAW:	ZRD	2017-12-6	TOLERANCE:		ANGLE:
CHECKED:	***	***	30≥	±0.30	±2°
			10~30	±0.20	
			5~10	±0.15	
APPROVALS:	***	***	≤5	±0.10	



® 东都电子

DONGDU ELECTRONICS

MODEL:	Connector	
PART NO:	1.57-nP-LT	
UNIT :mm	SCALE:1:1	
REV:	A	PAGE:1/1



MODEL:	Connector	
PART NO:	1.57-nP-LT	
UNIT :mm	SCALE:1:1	
REV:	A	PAGE:1/1