


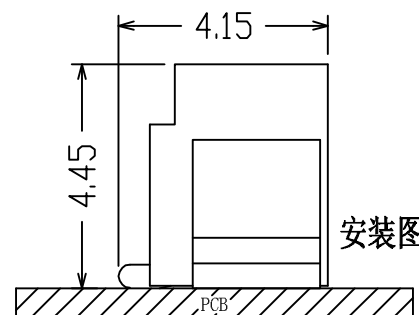
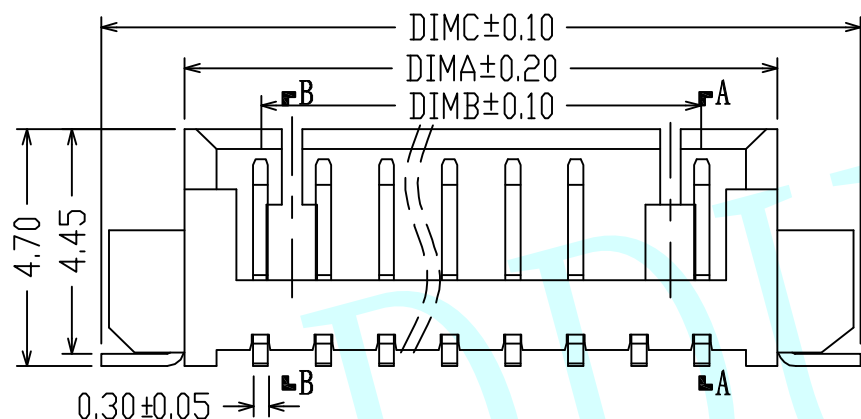


ROHS

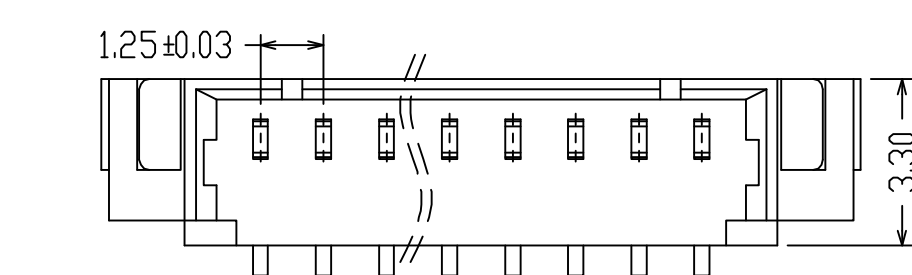

NOTES:

1. Applicable Wire: AWG#28~#32
2. Rated Voltage : 125V DC, AC (R. M. S)
3. Rated Current : 1A
4. Withstand Voltage : 500V AC/min
5. Working Temp : -25℃~+85℃
6. Insulation Resistance : $\geq 1000M\Omega$
7. Contact Resistance : $\leq 20M\Omega$

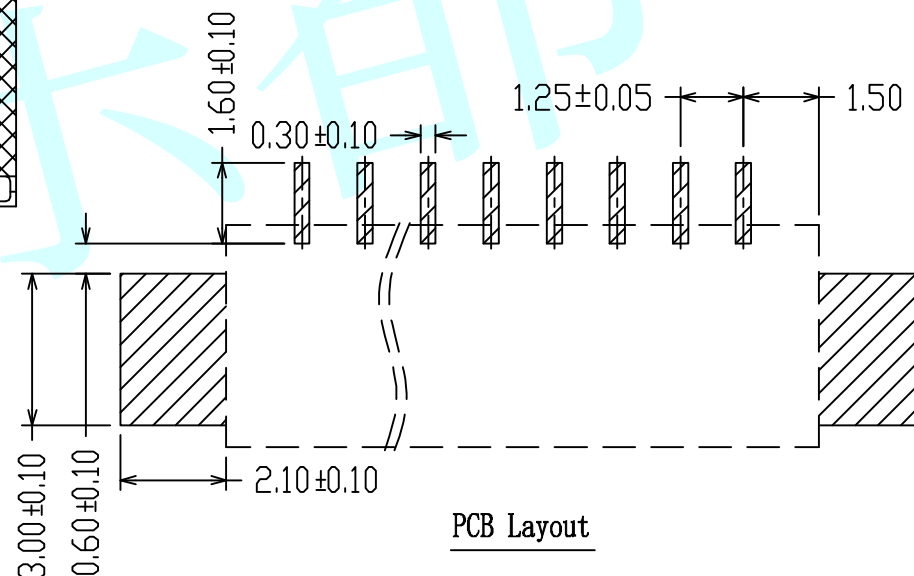

PCB Layout

DIM. C	7.55	8.80	10.05	11.30	12.55	13.80	15.05	16.30	17.55	18.80	20.05	21.30	22.55	23.80	25.05
DIM. B	1.25	2.50	3.75	5.00	6.25	7.50	8.75	10.00	11.25	12.50	13.75	15.00	16.25	17.50	18.75
DIM. A	4.25	5.50	6.75	8.00	9.25	10.50	11.75	13.00	14.25	15.50	16.75	18.00	19.25	20.50	21.75
NO. of Contacts	2P	3P	4P	5P	6P	7P	8P	9P	10P	11P	12P	13P	14P	15P	16P

APPROVALS		DATE	http://www.dongdudz.com		 ® 东都电子 DONGDU ELECTRONICS			
DRAW:	ZRD	2017-12-6	TOLERANCE:		ANGLE:			
CHECKED:	***	***	30≥	±0.30	±2°	MODEL:	Connector	
			10~30	±0.20		PART NO:	1.25T-nP-LT	
			5~10	±0.15		UNIT :mm	SCALE:1:1	
APPOVALS:	***	***	≤5	±0.10		REV:	A	PAGE:1/1