
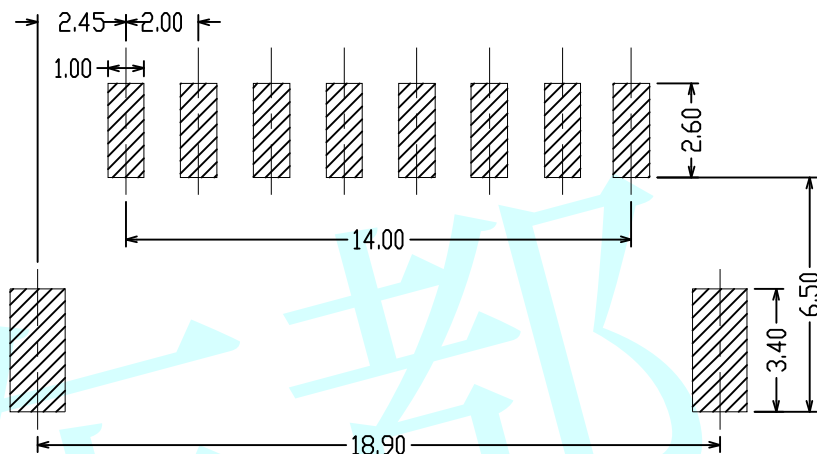
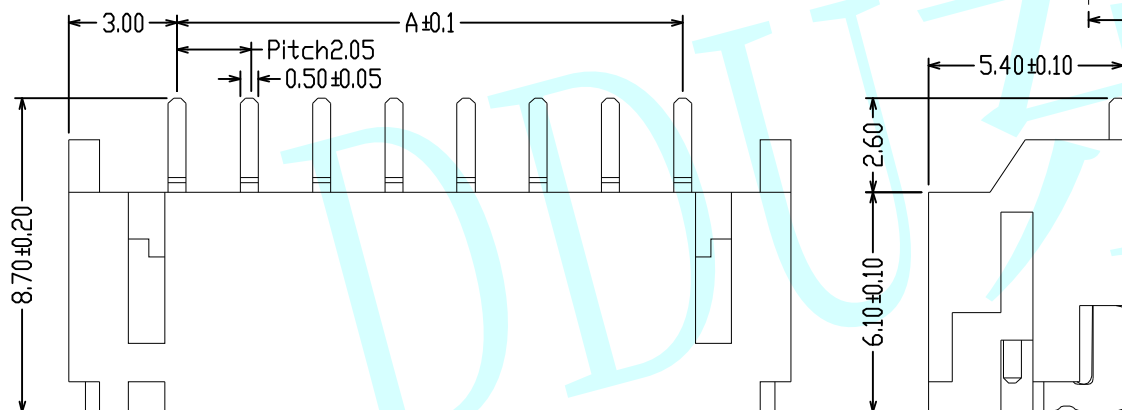


ROHS

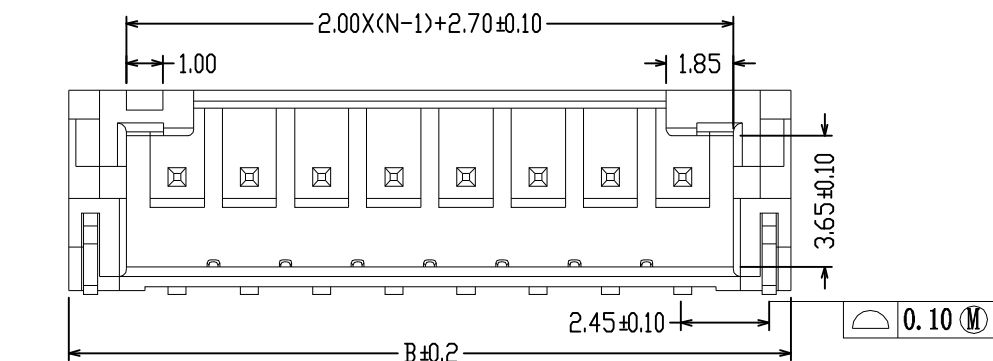

SPECIFICATIONS:

1. Current rating: $1.5 \sim 3.0 \text{ A}$
2. Voltage rating: 100 V AC
3. Withstand voltage: 800 V AC/minute
4. Contact resistance: $\leq 10 \text{ m}\Omega$
5. Solder temperature: $235 \pm 5^\circ \text{C}$, Time: $5 \pm 0.5 \text{ S}$
6. Insulation resistance: $1000 \text{ M}\Omega$
7. Working temperature: $-25^\circ \text{C} \sim +85^\circ \text{C}$

N	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
A	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00	20.00	22.00	24.00	26.00	28.00	30.00	32.00
B	8.00	10.00	12.00	14.00	16.00	18.00	20.00	22.00	24.00	26.00	28.00	30.00	32.00	34.00	36.00	38.00

APPROVALS		DATE	http://www.dongdudz.com		 ® 东都电子 DONGDU ELECTRONICS		
DRAW:	ZRD	2017-12-6	TOLERANCE:			ANGLE: ±2°	
CHECKED:	***	***	30≥	±0.30			
			10~30	±0.20			
			5~10	±0.15			
APPOVALS:	***	***	≤5	±0.10			
					MODEL:	Connector	
					PART NO:	2.0T-nP-TP	
					UNIT :mm	SCALE:1:1	
					REV:	A	PAGE:1/1