

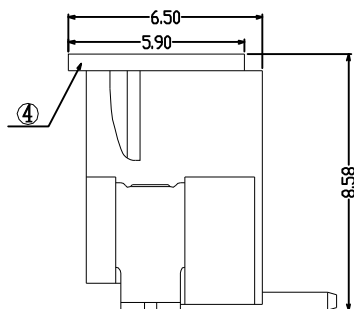
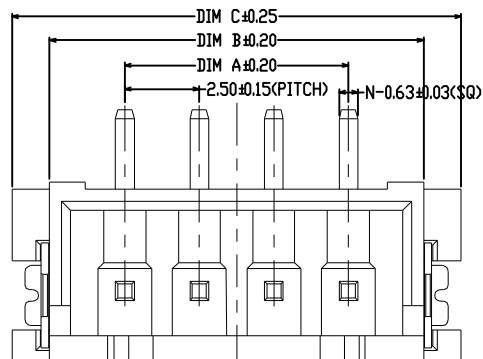



ROHS

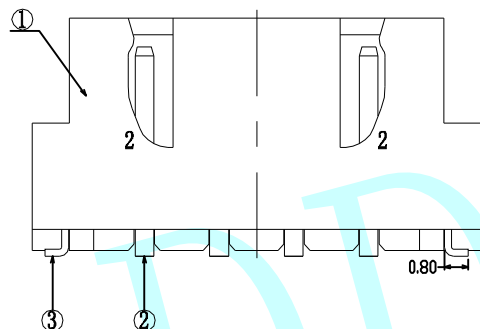


WITH COVER

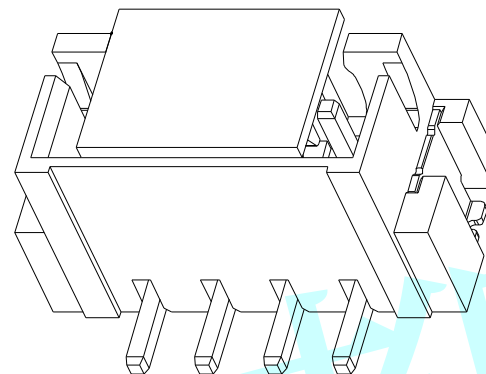


NOTES:

1. 塑件表面应光洁, 无毛边, 无明显收缩, 缺陷, 裂纹等现象。
2. 工作温度: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
3. 适用线规: AWG#30~#22
4. 额定值: AC/DC 250V (R. M. S)
5. 额定电流: 3A
6. 接触电阻: $20\text{m}\Omega$ max
7. 绝缘电阻: $1000\text{M}\Omega$ min

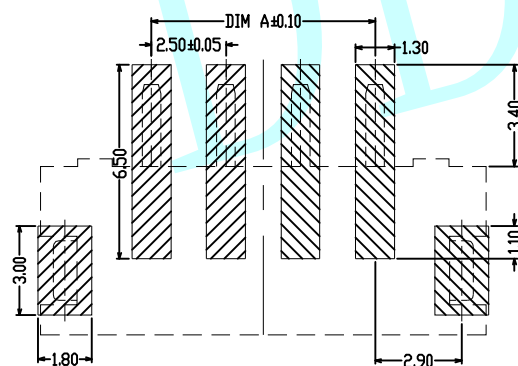

PCB LAYOUT (T=1.60mm)

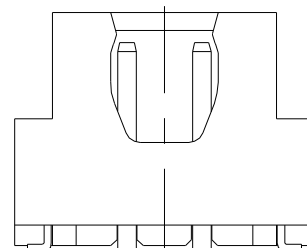

2P 结构

序号	名 称	材 质
1	2.50 M型立式WTB胶芯	LCP UL94V-0本色
2	2.50 M型立式WTB端子	黄铜/表面镀锡(镀金)
3	2.50 M型立式WTB焊片	黄铜/表面镀锡
4	2.50 M型立式WTB吸盖	LCP UL94V-0本色

16	37.50	42.50	45.00
15	35.00	40.00	42.50
14	32.50	37.50	40.00
13	30.00	35.00	37.50
12	27.50	32.50	35.00
11	25.00	30.00	32.50
10	22.50	27.50	30.00
9	20.00	25.00	27.50
8	17.50	22.50	25.00
7	15.00	20.00	22.50
6	12.50	17.50	20.00
5	10.00	15.00	17.50
4	7.50	12.50	15.00
3	5.00	10.00	12.50
2	2.50	7.50	10.00
CKT	DIM A	DIM B	DIM C

APPROVALS		DATE	http://www.dongdudz.com	
DRAW:	ZRD	2017-12-6	TOLERANCE:	ANGLE:
CHECKED:	***	****	30≥	±0.30
APPOVALS:	***	****	10~30	±0.20
			5~10	±0.15
			≤5	±0.10
			±2°	
			MODBL: Connector	
			PART NO: 2.50T-nP-KK-1T	
			UNIT :mm	SCALE:1:1
			REV:	A



MODEL:	Connector
PART NO:	2.50T-nP-KK-1T
UNIT :mm	SCALE:1:1
REV:	A