










ROHS

NOTES:

1. Current rating:1.0A
2. Voltage rating:125V
3. Withstand coltage:500V AC/minute
4. Contact resistance: $\leq 30\text{m}\Omega$
5. Insulation resistance:100M Ω Min
6. Working temperature:-25 $^{\circ}\text{C}\sim+85^{\circ}\text{C}$

TABLE:

N	A	B	C
2	5.75	3.85	1.25
3	7.00	5.10	2.50
4	8.25	6.35	3.75
5	9.50	7.60	5.00
6	10.75	8.85	6.25
7	12.00	10.10	7.50
8	13.25	11.35	8.75
9	14.50	12.60	10.00
10	15.75	13.85	11.25
11	17.00	15.10	12.50
12	18.25	16.35	13.75
13	19.50	17.60	15.00
14	20.75	18.85	16.25
15	22.00	20.10	17.50

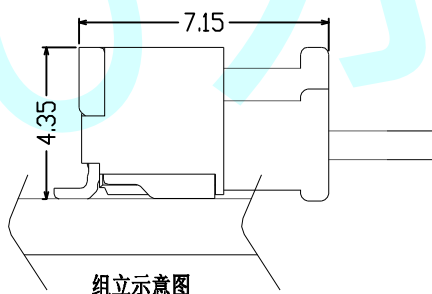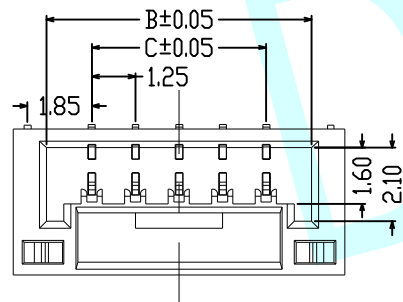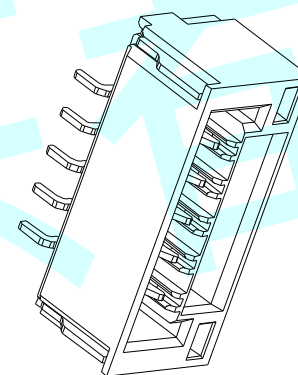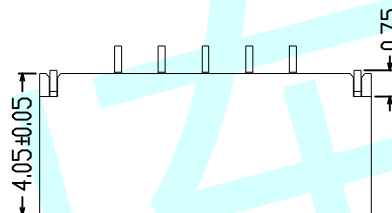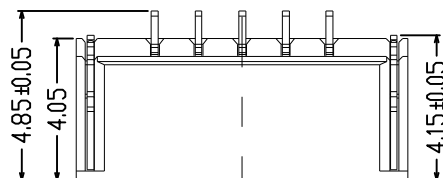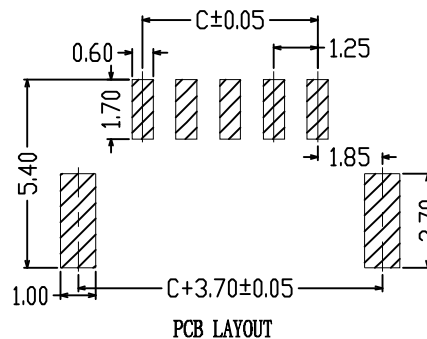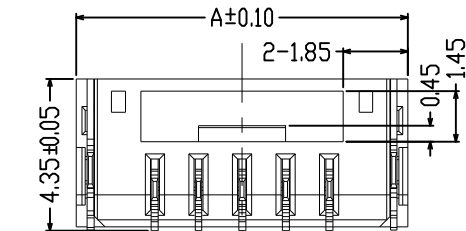

3	1. 25mm间距GH卧式贴板-焊片	磷铜C5191R-EH T=0.20mm	镀 锡	2PCS
2	1. 25mm间距GH卧式贴板-PIN	磷铜C5191R-EH T=0.20mm	镀 锡	nPCS
1	1. 25mm间距GH卧式贴板-基座	PA9T or LCP	UL 94V-0 米色	1PCS
序号	品 名	材料规格	电镀方式/颜色	数 量

APPROVALS		DATE	http://www.dongdudz.com	
DRAW:	ZRD	2017-12-6	TOLERANCE:	ANGLE:
CHECKED:	***	***	30 $\geq$	± 0.30
APPOVALS:	***	***	10 $\sim$ 30	± 0.20
			5 $\sim$ 10	± 0.15
			≤ 5	± 0.10
			$\pm 2^{\circ}$	
			DONGDU ELECTRONICS	
			Connector	
			DDU-CH4AWB	
			SCALE:1:1	
			PAGE:1/1	