

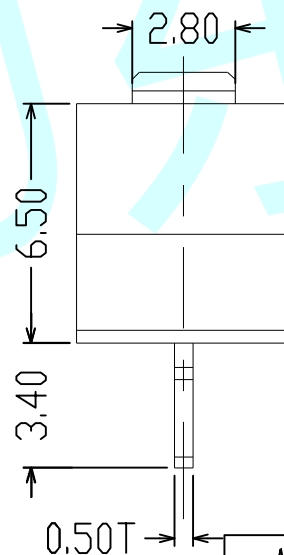
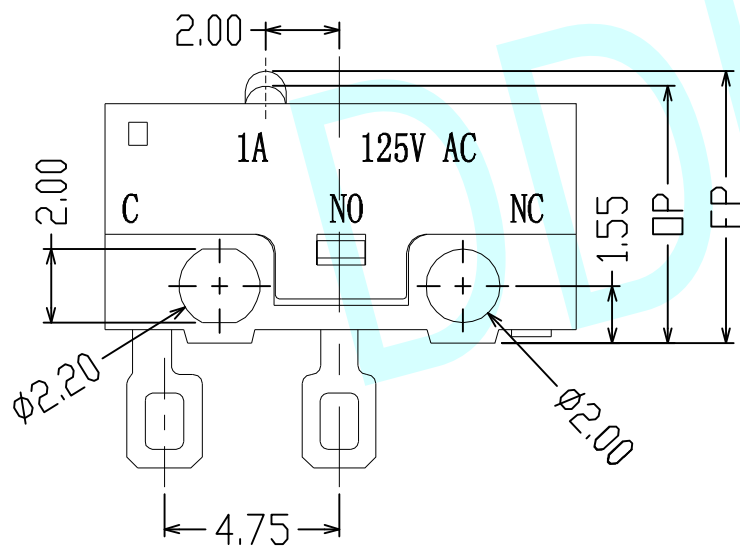


ROHS

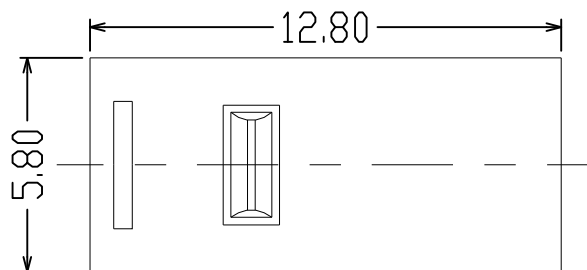



CONTACT CONFIGURATION

Electrical Characteristics:

1. Rating: 1A 125V AC
2. Contact Resistance: $50\text{m}\Omega$ max (Initial)
3. Insulation Resistance: $100\text{M}\Omega$ min (at 500V AC)
4. Dielectric strength: AC 500V (50/60Hz) for 1 minute

Mechanical Characteristics:

1. Operating force (OF): $70 \pm 20\text{g}$ max
2. Operating Position (OP): $6.95 \pm 0.3\text{mm}$
3. Operating Position (FP): $7.3 \pm 0.3\text{mm}$
4. Electrically Life: 30,000 cycles min
5. Operating temperature: $-20^\circ\text{C} \sim +70^\circ\text{C}$

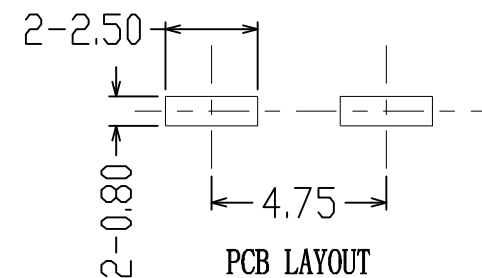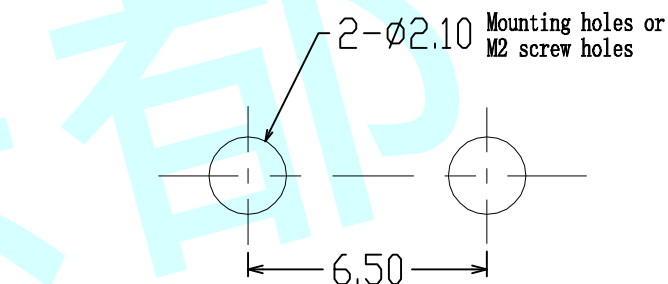

APPROVALS		DATE	http://www.dongdudz.com		 ® 东都电子 DONGDU ELECTRONICS		
DRAW:	ZRD	2017-12-6	TOLERANCE:			ANGLE:	
CHECKED:	***	****	30≥	±0.30		±2°	
			10~30	±0.20			
			5~10	±0.15			
APPROVALS:	***	****	≤5	±0.10			
					MODEL:	MICRO SWITCHS	
					PART NO:	DDU-1726	
					UNIT :mm	SCALE:1:1	
					REV :	A	PAGE:1/1