

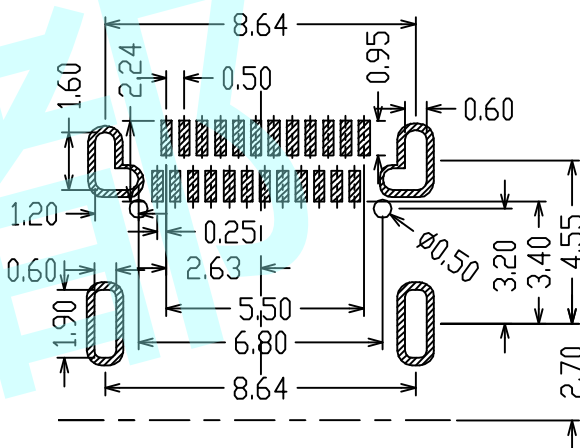
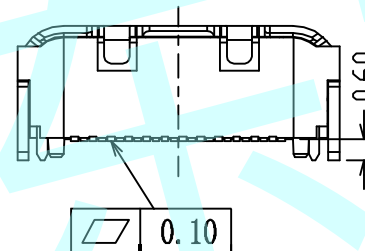
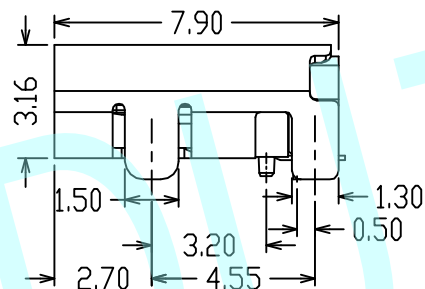
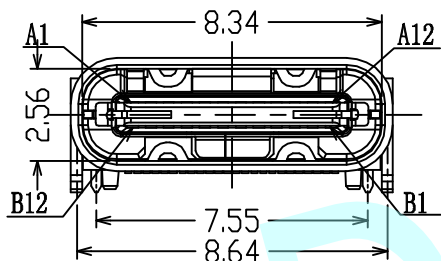
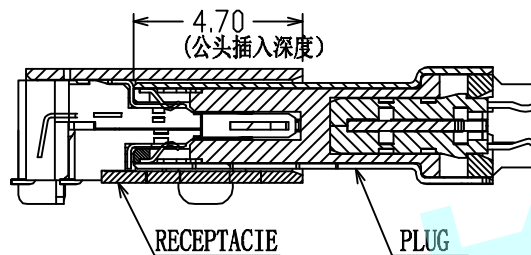



ROHS



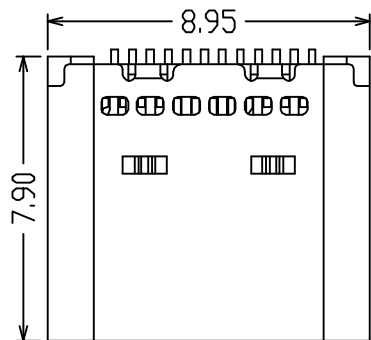

RECOMMENDED PCB LAYOUT
TOLERANCE UNSPECIFIED $\pm 0.05\text{mm}$

NOTES:

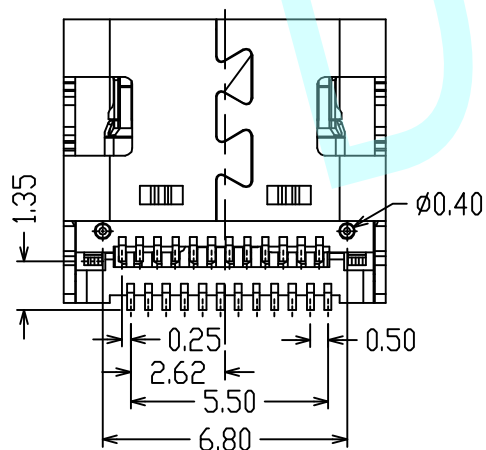1. Current Rating: 3A MAX
2. Voltage: 100V AC
3. Temperature Range: $-30^{\circ}\text{C} \sim 85^{\circ}\text{C}$
4. Contact Resistance: $40\text{m}\Omega$ Max
5. Insulator Resistance: $100\text{M}\Omega$ Min
6. Insertion Force: $5\text{N} \sim 20\text{N}$
7. Unmating Force: $8\text{N} \sim 20\text{N}$.
8. Durability: 10,000 Cycles.



APPROVALS		DATE	http://www.dongdudz.com	
DRAW:	ZRD	2017-12-6	TOLERANCE:	ANGLE:
CHECKED:	***	***	30 \geq	± 0.30
APPOVALS:	***	***	10 \sim 30	± 0.20
			5 \sim 10	± 0.15
			≤ 5	± 0.10
				$\pm 2^{\circ}$

 ® 东都电子 DONGDU ELECTRONICS		MODEL:	USB CONNECTOR	
		PART NO:	TYPE: C-3.1-05M	
UNIT :mm	SCALE:1:1			
REV:	A			