


# ROHS

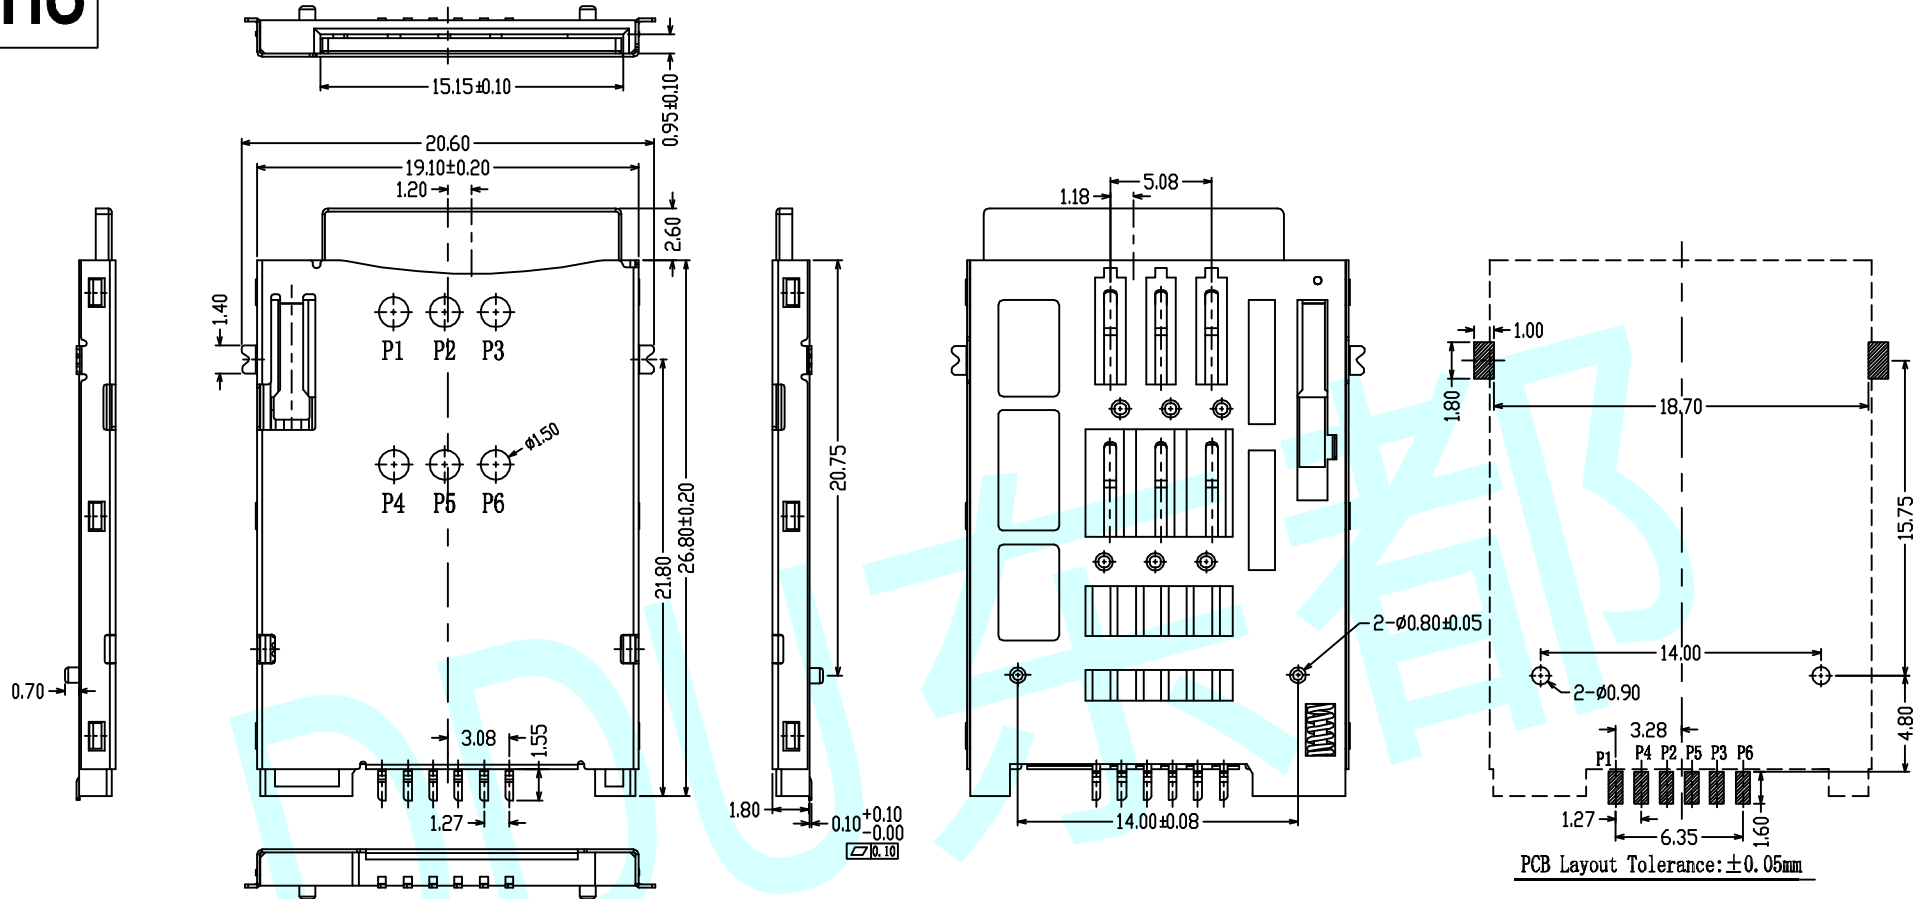

**NOTES:**

**A. Electrical Performance:**

1. Voltage Rating: 12V DC
2. Contact Resistance: 100mΩ max
3. Dielectric Strength: 500V AC For 1 Minrte


**B. Mechanical Performance:**

1. Insertion Force: 0.5Kgf~1.5Kgf
2. Ejection Force: 0.5Kgf~1.5Kgf
3. Cycle Life: 2000 Times

PIN NO.	CONNECTOR TERMINAL
P1	VCC:PWR SIGNAL GND
P2	RST: REST SIGNAL
P3	CLK: CLOCK SIGNAL
P4	GND: RWR SIGNAL GND
P5	VPP: PROGRAMMING VOLTAGE
P6	IO: SERIAL DATA INPUT OUTPUT

APPROVALS		DATE	http://www.dongdudz.com	
DRAW:	ZRD	2017-12-6	TOLERANCE:	ANGLE:
CHECKED:	***	****	30°	±0.30
APPROVALS:	***	****	10°~30	±0.20
			5°~10	±0.15
			≤5	±0.10
			±2°	

 <b>东都电子</b> DONGDU ELECTRONICS	
MODL:	CASSETTE
PART NO:	SIM-06A
UNIT :mm	SCALE: 1:1
REV:	A
	PAGE: 1/1