


ROHS

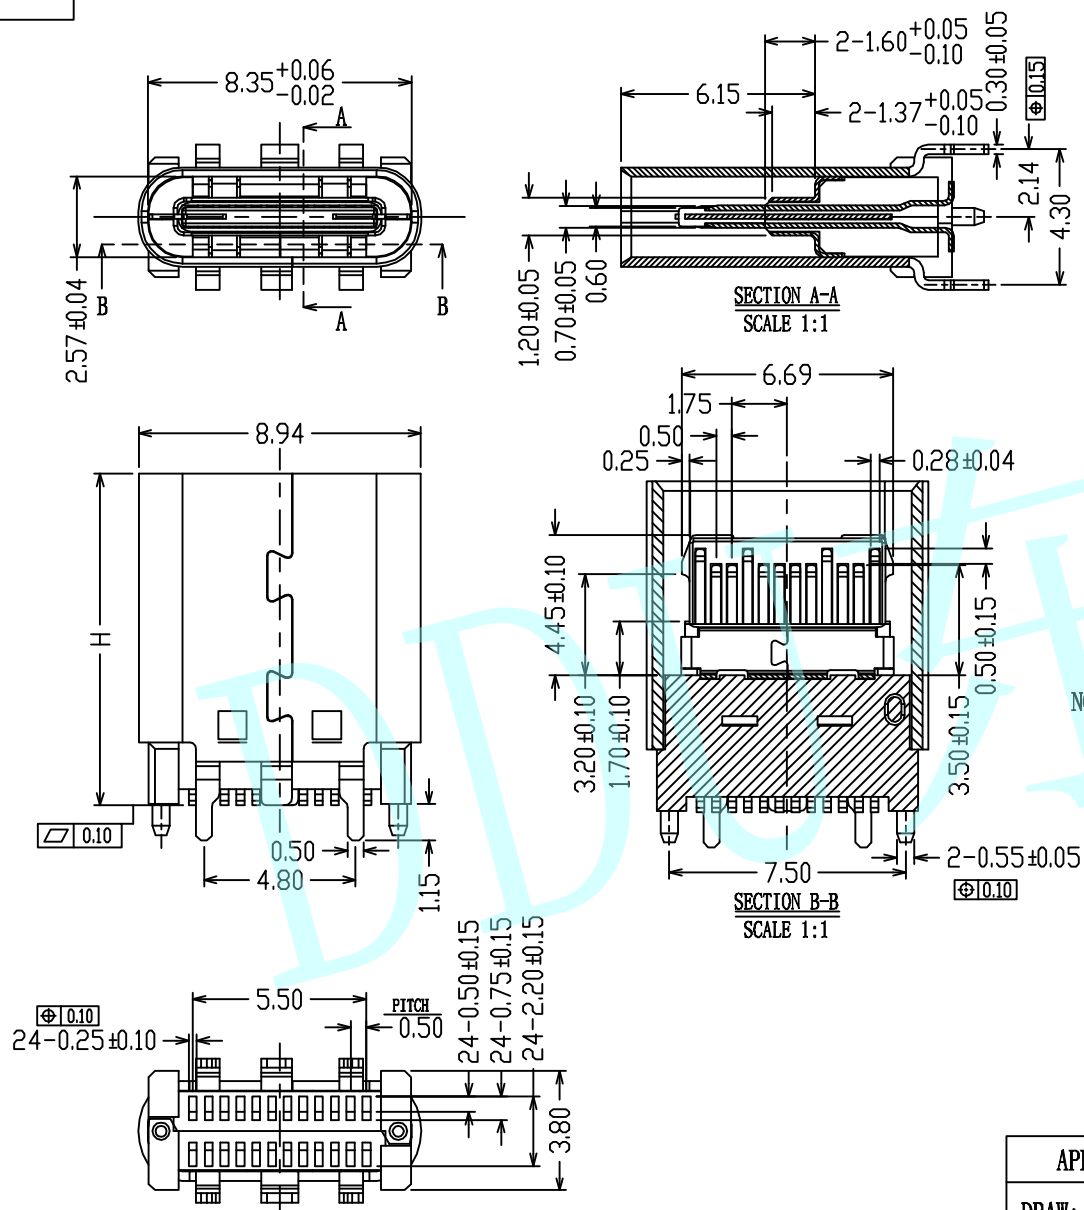

Recommended PCB Layout (T=1.00mm)
Tolerance Unspecified ±0.05mm
SCALE: 2:1

NOTES:

A. Electrical:

1. Current: 5A Min For Vbus; 0.25A Min For Other
2. Voltage: 20V Max
3. Withstanding Voltage: 100V AC
4. Contact Resistance: 40mΩ Max
5. Insulation Resistance: 100MΩ Min

B. Mechanical:

1. Insulation: 5~20N
2. Extraction: 8~20N
3. Durability: 10,000 Cycles

		H		9.30	10.50
APPROVALS		DATE		http://www.dongdudz.com	
DRAW:	ZRD	2017-12-6		TOLERANCE:	ANGLE:
CHECKED:	***	***		30≥	±0.30
APPOVALS:	***	***		10~30	±0.20
				5~10	±0.15
				≤5	±0.10
				±2°	
				MODEL: USB CONNECTOR	
				PART NO: TYPE: C-3.1-06M	
				UNIT: mm	SCALE: 1:1
				REV: A	PAGE: 1/1

® 东都电子
DONGDU ELECTRONICS