
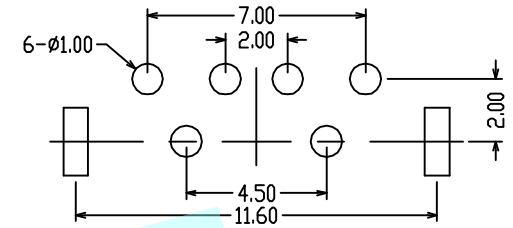
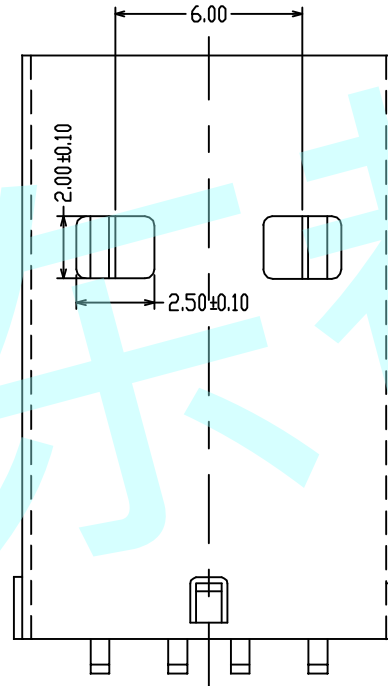
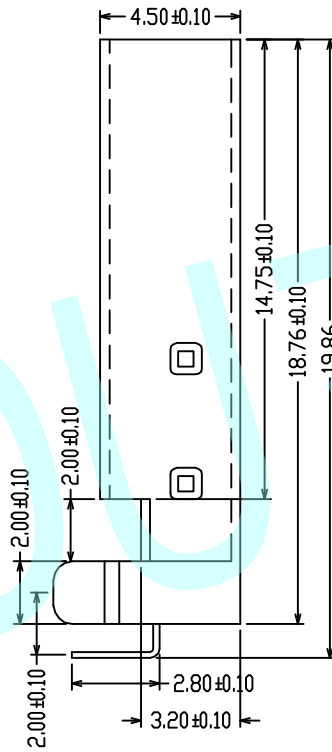
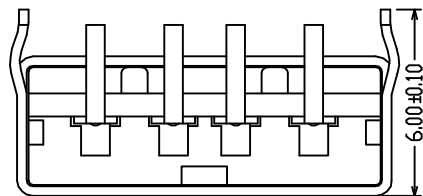
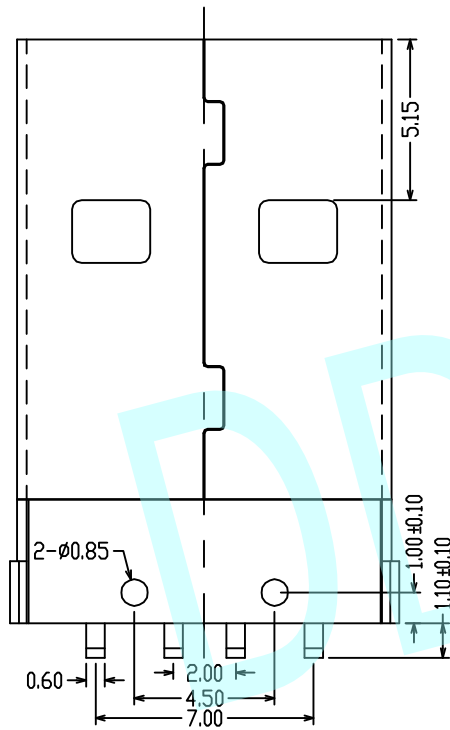




ROHS

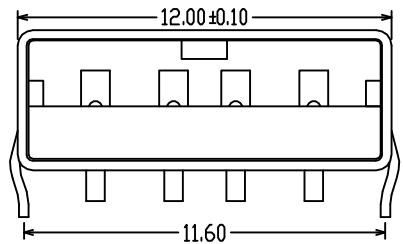

PCB Layout

NOTES:

1. Rating :DC 30V 1.0A
2. Contact Resistance: $\leq 50m\Omega$
3. Insulation Resistance: $\geq 1000m\Omega$ Min DC 250V
4. Operating Temperature Range: $-40^{\circ}C \sim 85^{\circ}C$

APPROVALS		DATE	http://www.dongdudz.com		 东都电子 DONGDU ELECTRONICS
DRAW:	ZRD	2017-12-6	TOLERANCE:	ANGLE:	
CHECKED:	***	***	30 \geq	± 0.30	$\pm 2^{\circ}$
APPOVALS:	***	***	10 \sim 30	± 0.20	
			5 \sim 10	± 0.15	
			≤ 5	± 0.10	
MODEL:	USB CONNECTOR		UNIT :mm	SCALE: 1:1	
PART NO:	USB 2.0-1917		REV:	A	