
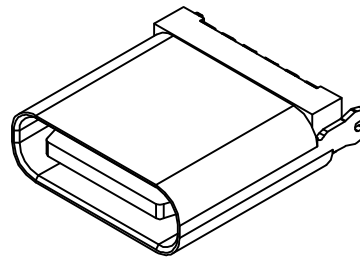
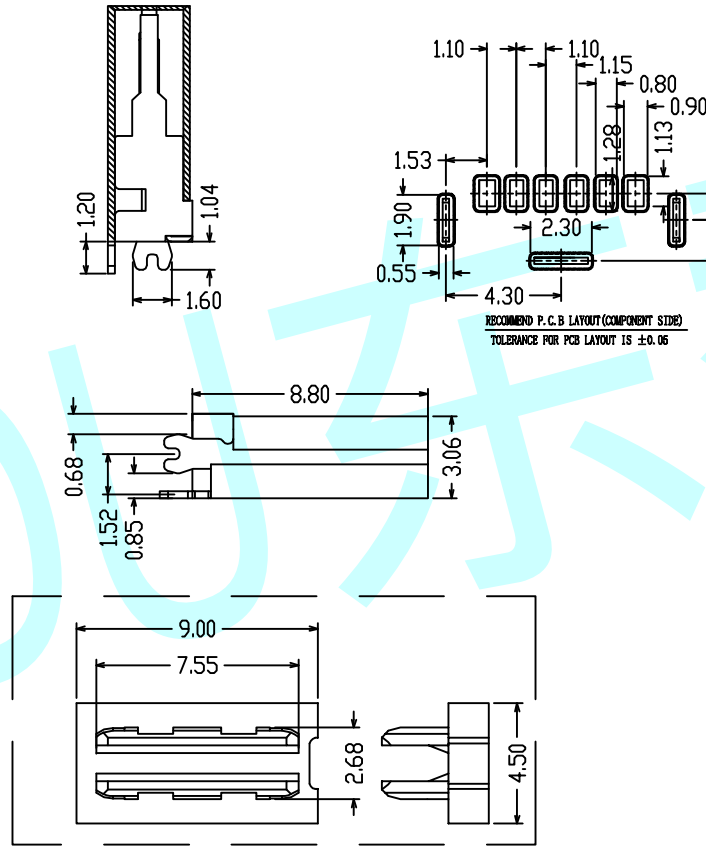


ROHS

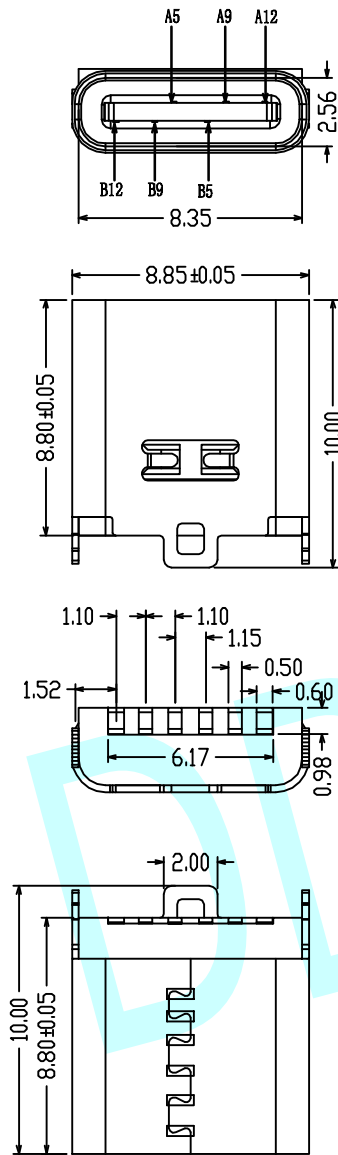

备注 (NOTE):

1. 材质:

- 1.1 胶芯: LCP UL94 V-0
- 1.2 端子: C2680, T=0.2mm; 镍底, 镀金
- 1.3 外壳: 不锈钢201-H 表面镀镍

2. 电气特性:

- 2.1 接触区: 接触电阻40mΩ Max, 允许10mΩ变化量. 测试条件: 20mv, 100mA下测量.
- 2.2 接触电流: 3A VBUS引脚; 1.25A用于GND引脚; 其他引脚为0.25A.
- 2.3 额定电压: 5V.
- 2.4 耐受电压: 100VAC.
- 2.5 绝缘电阻: 至少100兆欧.

3. 机械性能:

- 3.1 插入力: 0.5-2.0Kg
- 3.2 拔出力: 0.6-2.04Kg
- 3.3 插拔次数: 5000次.
4. 工作环境: -20℃ to +85℃.

5. 耐焊接热: 端子浸入250±5℃的锡槽中; 历时3-5S±0.5Sec, 沾锡面积95%以上

6. 外观: 部件可以承受以下焊接条件:

温度250℃, 时间8-10秒, 外观无损坏变形

7. 包装: 编带, 800pcs一盘

USB TYPE C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
		B12	GND
		B9	VBUS
A5	CC1		
		B5	CC2
A9	VBUS		
A12	GND		

TABLE:

NO	PART	Q' TY	Material
1	SHELL	1	ZINC ALLOY, NI30u"Min PLATED
2	CONTACT	6	C2680, TIN80u"/Au1u"/NI30u" PLATED
3	IMD HOUSING	1	LCP UL94 V-0 BLACK
4	CAP	1	LCP UL94 V-0 BLACK

APPROVALS		DATE	http://www.dongdudz.com	
DRAW:	ZRD	2023-12-6	TOLERANCE:	ANGLE:
CHECKED:	***	***	30° ±0.30	±2°
APPOVALS:	***	***	10°30 ±0.20	
			5°10 ±0.15	
			≤5 ±0.10	



MODEL:	USB CONNECTOR	
PART NO:	Type-C-6P-1T-1.8.8	
UNIT :mm	SCALE: 1:1	
REV:	A	PAGE: 1/1