
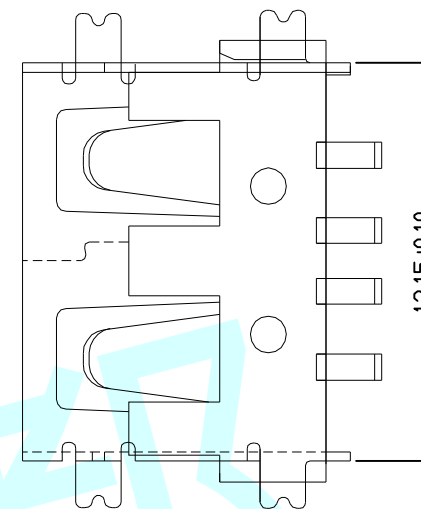
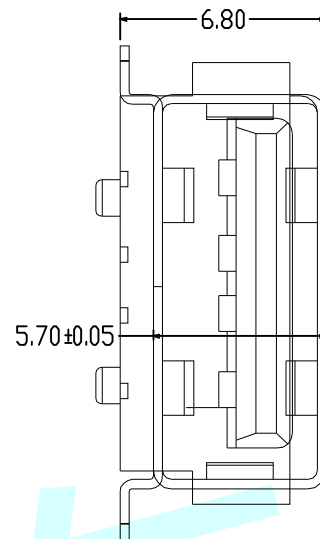


ROHS

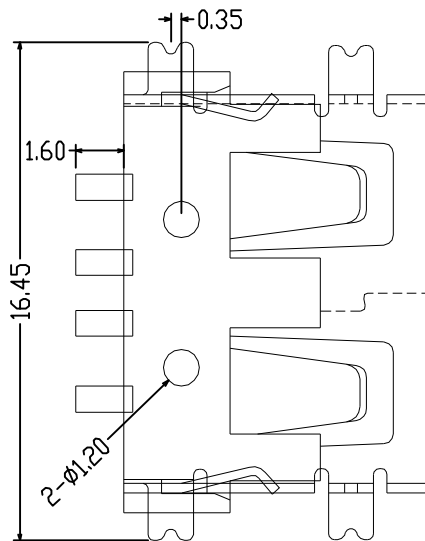

NOTES:

1. Material Specifcation

- 1.1. Insulation Material Thermoplasti
- 1.2. Shell: Copper Alloy/SPCC, T=0.30mm
Plating: Nickel
- 1.3. Terminal: Copper Alloy, T=0.25mm
Plating: GOLD/TIN PLATED.


2. ELECTRICAL CHEARACTERISTIC:

- 2.1. Insulation Resistance: 1000MΩ MIN
- 2.2. Contact Resistance: 30mΩ MAX
- 2.3. Withstanding Voltage: 500V AC


3. Mechanical Characteristics:



- 3.1. Insertion Force: 3.57kgf MAX
- 3.2. Extraction Force: 1.02kgf MIN

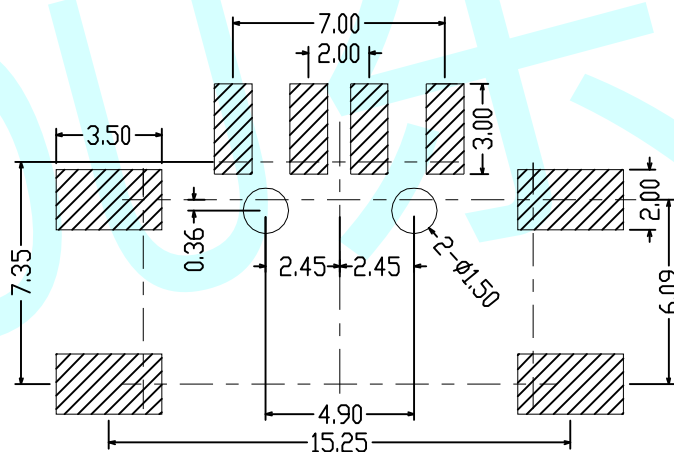ORDERING INFORMATION

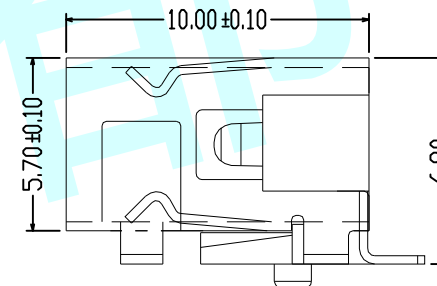

PCB LAYOUT



APPROVALS		DATE	http://www.dongdudz.com		 ® 东都电子 DONGDU ELECTRONICS
DRAW:	ZRD	2017-12-6	TOLERANCE:	ANGLE:	
CHECKED:	***	***	30°	±0.30	±2°
APPOVALS:	***	***	10°30'	±0.20	
			5°10'	±0.15	
			≤5	±0.10	
MODEL:	USB CONNECTOR		UNIT :mm	SCALE: 1:1	
PART NO:	USB AP-13-ZB-H6.8		REV:	A	PAGE: 1/1