
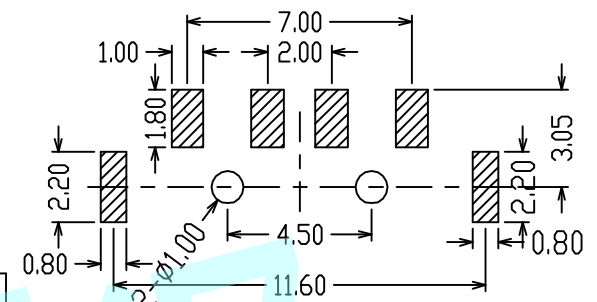
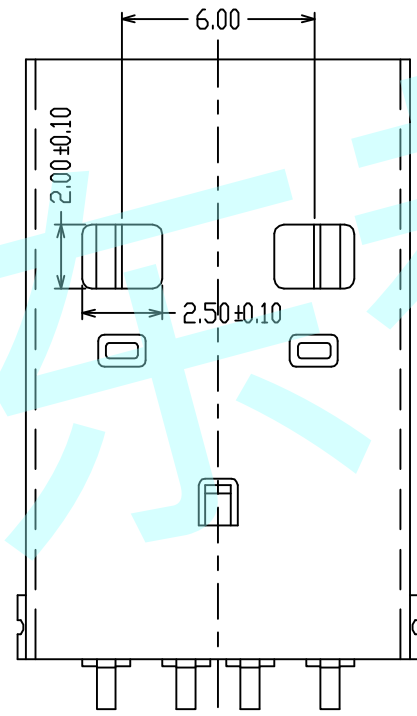
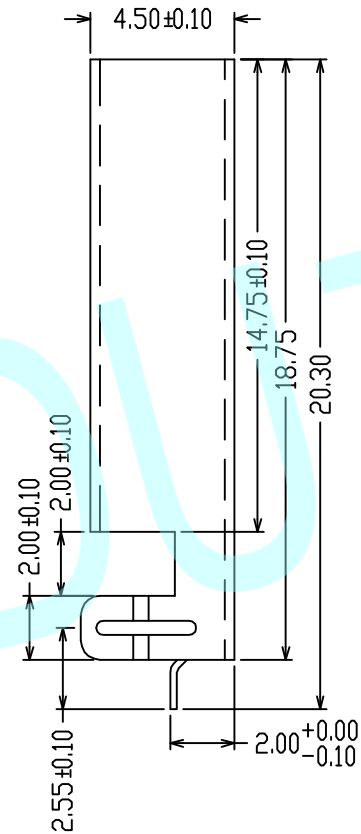
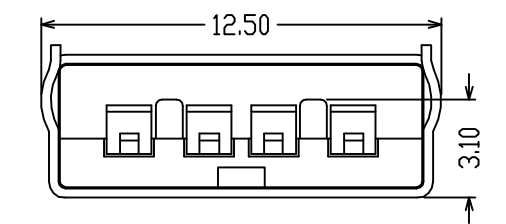
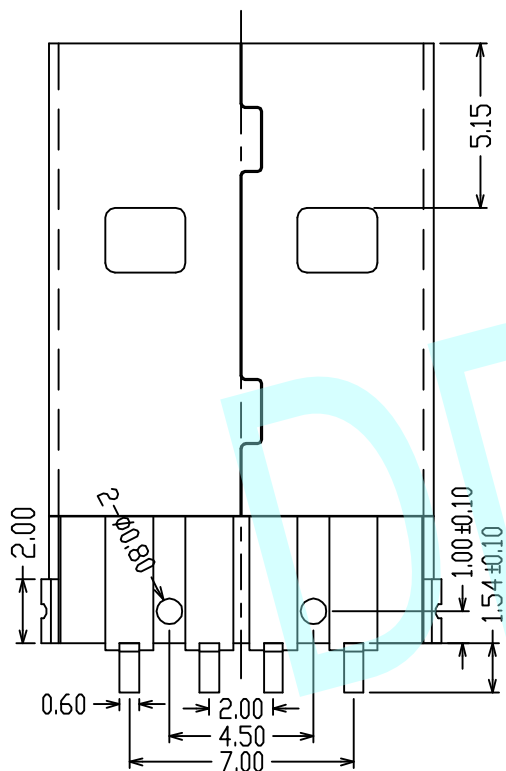


**ROHS**

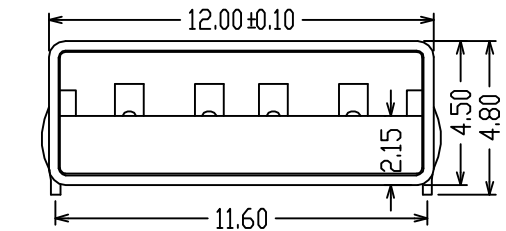

PCB Layout

**NOTES:**

1. Rating :DC 30V 1.0A
2. Contact Resistance: ≤50mΩ
3. Insulation Resistance: ≥1000mΩ Min DC 250V
4. Operating Temperature Range: -40°C~85°C

APPROVALS		DATE	http://www.dongdudz.com	
DRAW:	ZRD	2017-12-6	TOLERANCE:	ANGLE:
CHECKED:	***	***	30°	±2°
APPOVALS:	***	***	10°30'	
			5°10'	
			≤5	±0.10
				MODL: USB CONNECTOR
				PART NO: USB 2.0-1916
				UNIT :mm SCALE:1:1
				REV: A PAGE:1/1

