
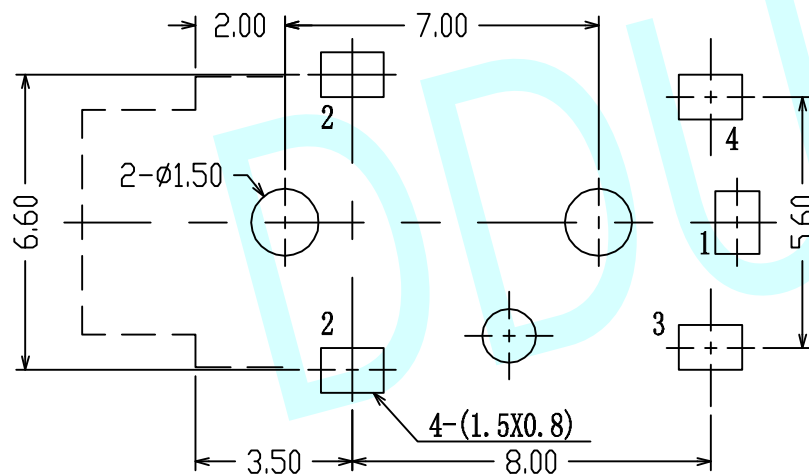
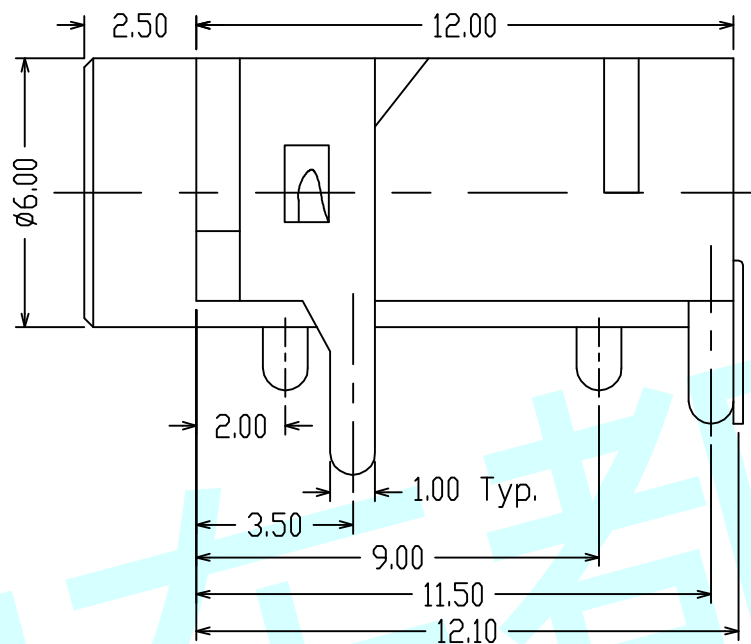


ROHS

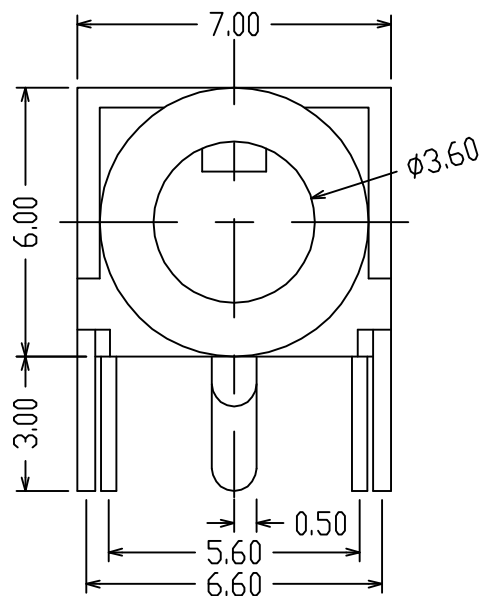

PCB Layout (Copper-Sided View)



NOTES:

1. Rating :0.5A 30V DC
2. Contact Resistance :100mΩ Max
3. Operating Temperature:-20℃~+70℃
4. Operating Force:3-20N
5. Operating Life:5,000 Cycles

Schematic

PJ-261

PJ-261-A



APPROVALS		DATE	http://www.dongdudz.com		 ® 东都电子 DONGDU ELECTRONICS				
DRAW:	ZRD	2017-12-6	TOLERANCE:					ANGLE:	
CHECKED:	***	****	30≥	±0.30				±2°	
			10~30	±0.20					
			5~10	±0.15					
APPROVALS:	***	****	≤5	±0.10					
MODEL:		PHONE JACKS							
PART NO:		PJ-261							
UNIT :mm		SCALE:1:1							
REV:		A		PAGE:1/1					



® 东都电子

DONGDU ELECTRONICS

MODEL:	PHONE JACKS		
PART NO:	PJ-261		
UNIT :mm	SCALE:1:1		
REV:	A	PAGE:1/1	