

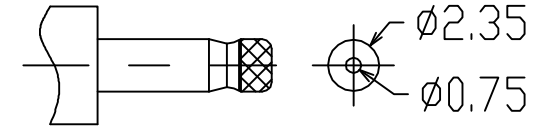
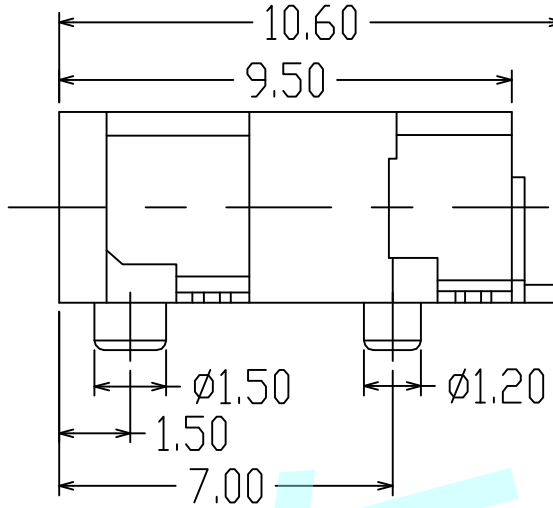



ROHS

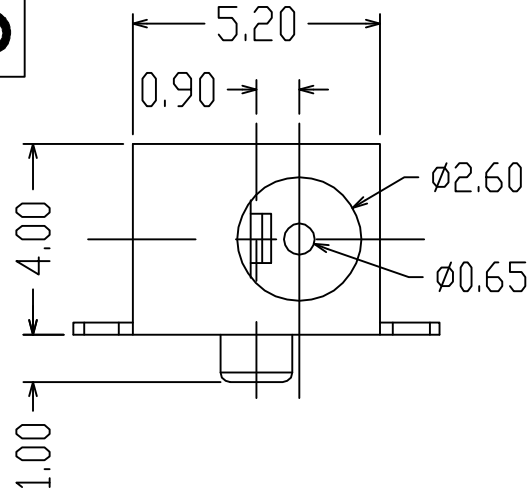


CIRCUIT DIAGRAM

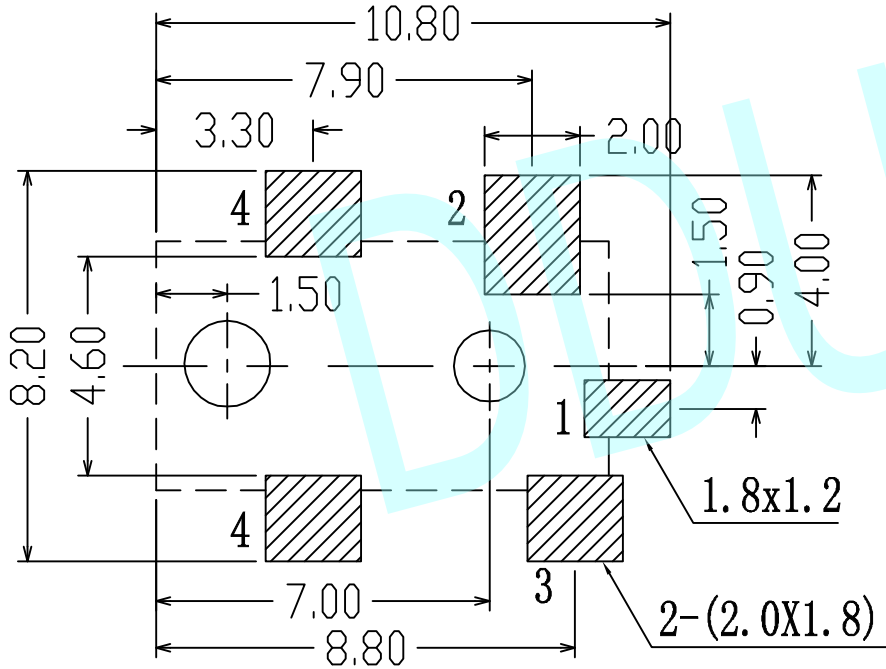

PCB Layout (Copper-Side View)





CIRCUIT DIAGRAM



CIRCUIT DIAGRAM

NOTES:

1. Rating:0.5A 30V DC
2. Contact Resistance:100mΩ Max
3. Operating temperature:-20℃~70℃
4. Operating force:3-20N
5. Operating Life:5,000 cycles

APPROVALS		DATE	http://www.dongdudz.com		 ® 东都电子 DONGDU ELECTRONICS	
DRAW:	ZRD	2017-12-6	TOLERANCE:	ANGLE:		
CHECKED:	***	***	30 [≥]	±0.30		±2°
APPOVALS:	***	***	10 [~] 30	±0.20		
			5 [~] 10	±0.15		
			≤5	±0.10		
MODEL:	DC POWER JACK		UNIT :mm	SCALE:1:1		
PART NO:	DC-041		REV:	A	PAGE:1/1	