

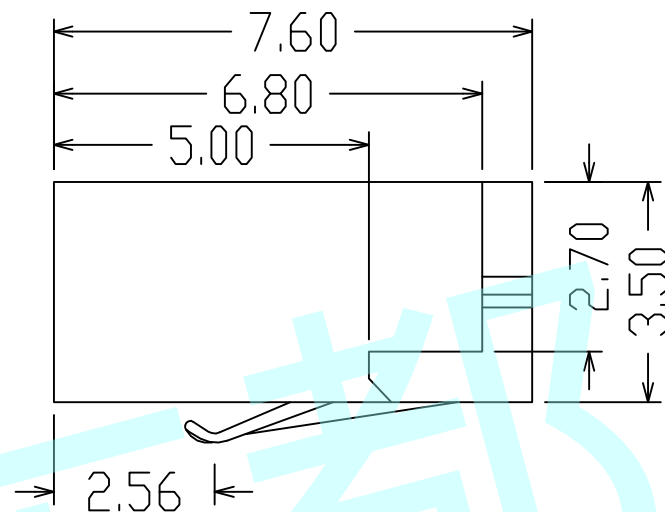


ROHS

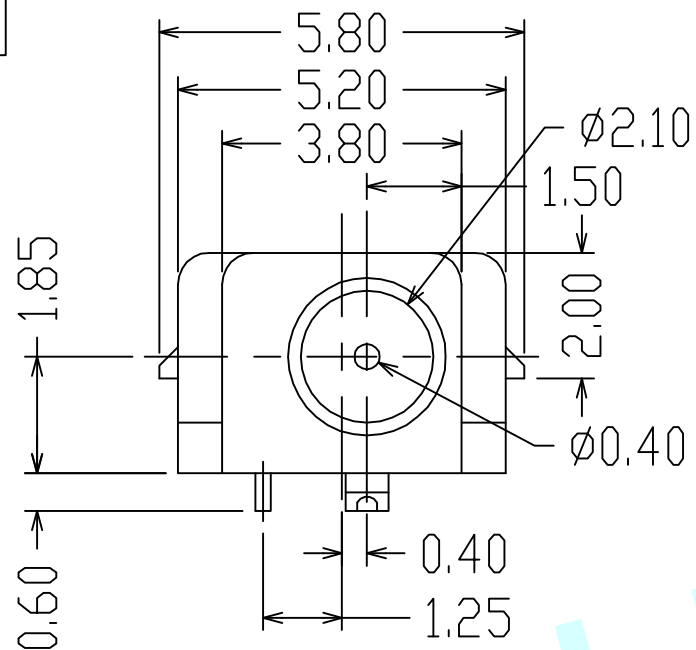


NOTES:

1. Rating: 0.5A 30V DC
2. Contact Resistance: 100mΩ Max
3. Operating temperature: -20℃~70℃
4. Operating force: 3-20N
5. Operating Life: 5,000 cycles



CIRCUIT DIAGRAM

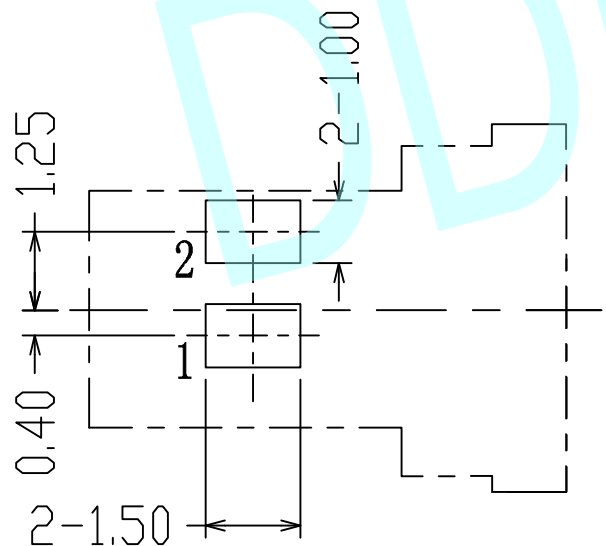

PCB LAYOUT (Copper-side view)

APPROVALS		DATE	http://www.dongdudz.com	
DRAW:	ZRD	2017-12-6	TOLERANCE:	ANGLE:
CHECKED:	***	***	30≥	±0.30
APPOVALS:	***	***	10~30	±0.20
			5~10	±0.15
			≤5	±0.10

MODEL:	DC POWER JACK	
PART NO:	DC-060	
UNIT :mm	SCALE:1:1	☞
REV:	A	PAGE:1/1

