

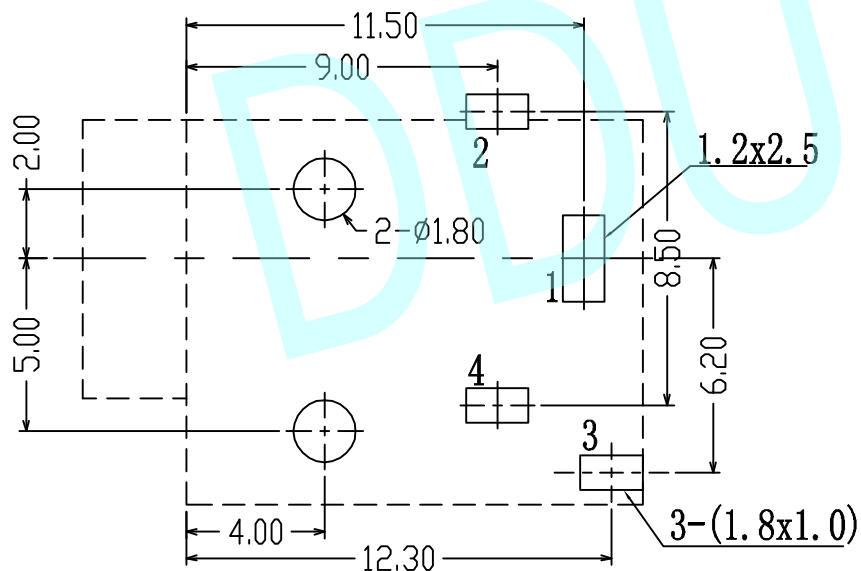
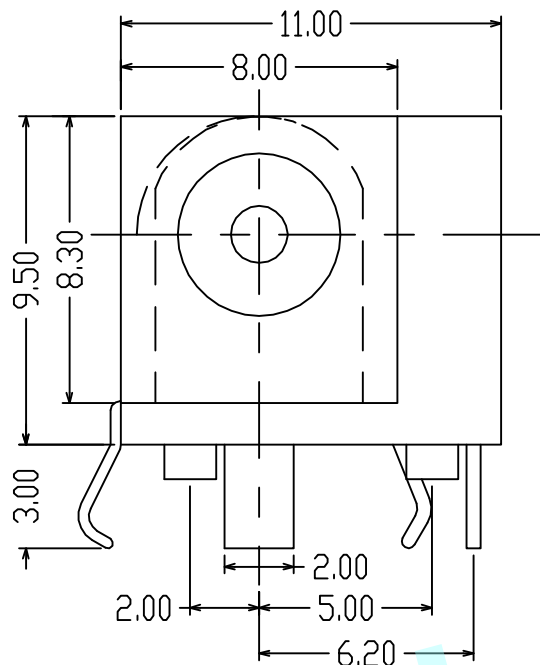


ROHS

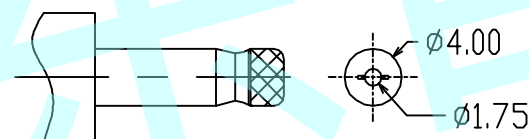

PCB Layout (Copper-Side View)

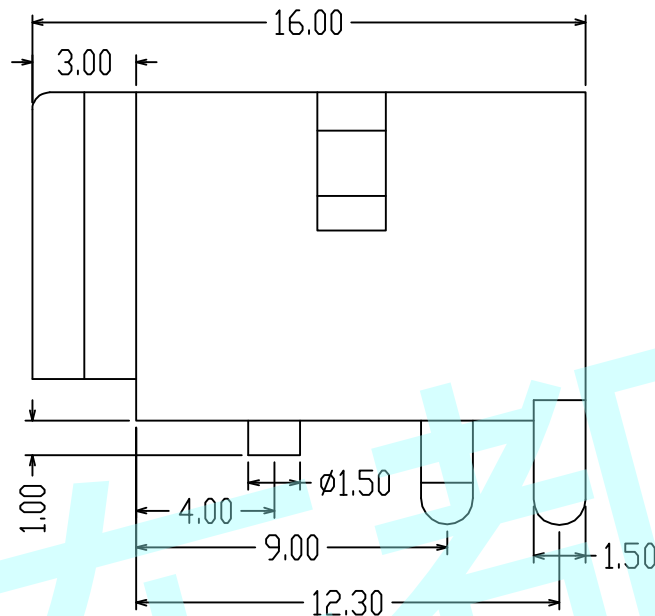


DC MATE PLUG

NOTES:


1. Rating: 0.5A 30V DC
2. Contact Resistance: 100mΩ Max
3. Operating temperature: -20°C~70°C
4. Operating force: 3-20N
5. Operating Life: 5,000 cycles

DC-066-A



CIRCUIT DIAGRAM

DC-066-B



CIRCUIT DIAGRAM

APPROVALS		DATE	http://www.dongdudz.com		® 东都电子 DONGDU ELECTRONICS				
DRAW:	ZRD	2017-12-6	TOLERANCE:					ANGLE:	
CHECKED:	***	***	30≥	±0.30				±2°	
			10~30	±0.20					
			5~10	±0.15					
APPOVALS:	***	***	≤5	±0.10					
			MODEL: DC POWER JACK						
			PART NO: DC-066						
			UNIT :mm		SCALE:1:1				
			REV: A		PAGE:1/1				