

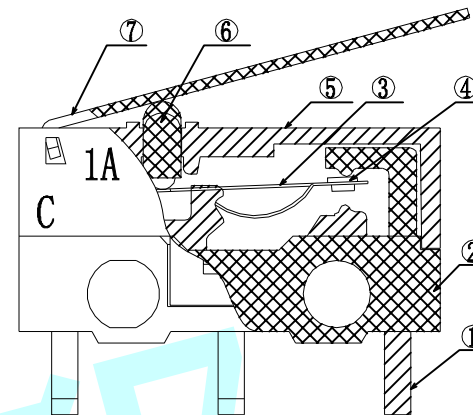
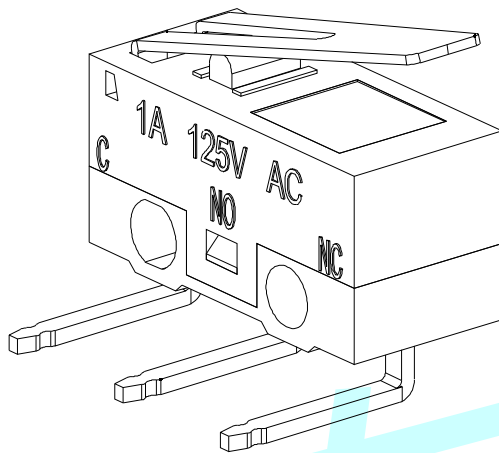
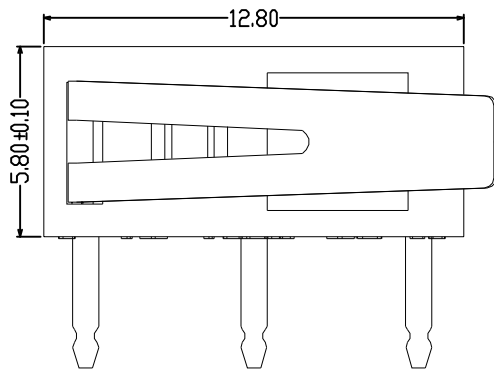
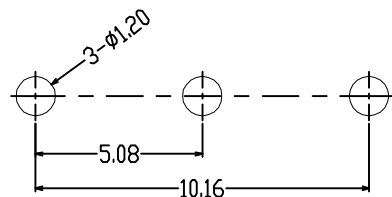


ROHS

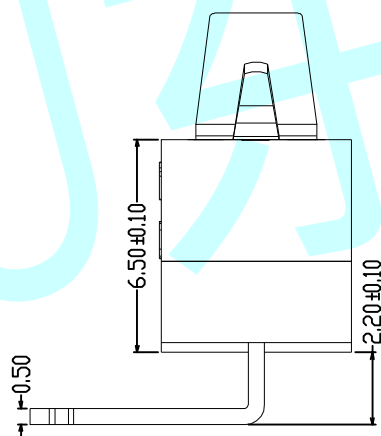


NOTES:

1. Rated value: AC 125V 1A
2. Insulation resistance: 500MΩ MIN
3. Contact resistance: 100mΩ MAX
4. Withstand voltage: AC 500V 1 minute
5. Mechanical life: 100,000 cycles
6. Electrical life: 100,000 cycles

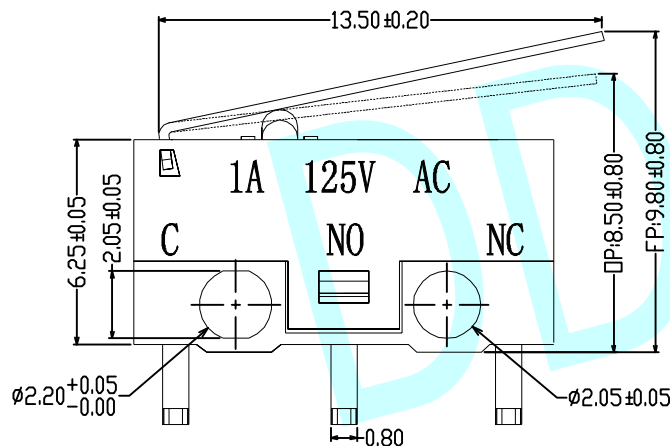

PCB LAYOUT



| 序号 | 零件         | 数量 | 材质        | 表面状态   |
|----|------------|----|-----------|--------|
| 1  | 接触脚        | 3  | 黄铜 0.52mm | 镀银(白色) |
| 2  | 基座         | 1  | PPA       | 白色     |
| 3  | 90°~120g簧片 | 1  | 磷铜 0.08mm |        |
| 4  | 触点         | 1  | 覆银点 Ø0.60 |        |
| 5  | 盖子         | 1  | PBT       | 黑色     |
| 6  | 按钮         | 1  | POM       | 白色     |
| 7  | 手柄         | 1  | SUS       |        |

| APPROVALS |     | DATE      | http://www.dongdudz.com |        |
|-----------|-----|-----------|-------------------------|--------|
| DRAW:     | ZRD | 2017-12-6 | TOLERANCE:              | ANGLE: |
| CHECKED:  | *** | ****      | 30≥                     | ±0.30  |
| APPOVALS: | *** | ****      | 10°~30                  | ±0.20  |
|           |     |           | 5°~10                   | ±0.15  |
|           |     |           | ≤5                      | ±0.10  |
|           |     |           | ±2°                     |        |
|           |     |           | MODEL: MICRO SWITCHES   |        |
|           |     |           | PART NO: DDU-1702-Z     |        |
|           |     |           | UNIT :mm SCALE:1:1      |        |
|           |     |           | REV: A PAGE:1/1         |        |

