
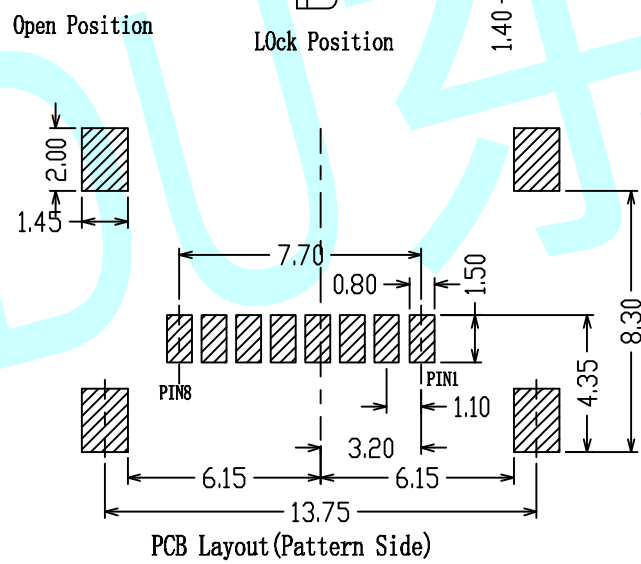



ROHS

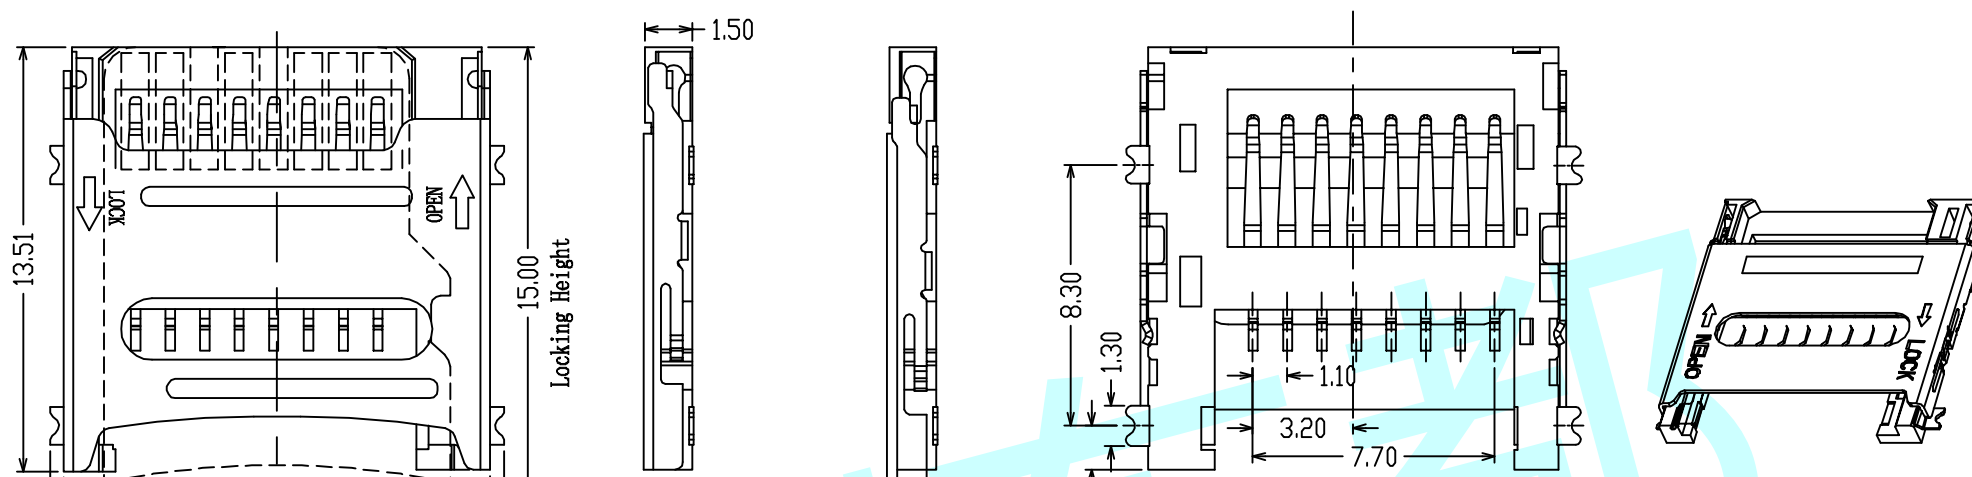

NOTES:

- A. Electrical Characteristics:
 1. Contact Current Rating:0.5A
 2. Dielectric Withstanding Voltage:AC 500V R. M. S
 3. Insulation Resistance:1000MΩ Min
 4. Contact Resistance:40mΩ Max
- B. Environmental:
 1. Operating Temperature:-25°C~+85°C
- C. Environmental:
 1. Mating Cycles:10,000 Insertions

Pin8	DAT1
Pin7	DATO
Pin6	VSS
Pin5	CLK
Pin4	VDD
Pin3	CMD
Pin2	CD/DAT3 ²
Pin1	DTA2
PIN	SIGNAL NAME

APPROVALS		DATE	http://www.dongdudz.com	
DRAW:	ZRD	2017-12-6	TOLERANCE:	ANGLE:
CHECKED:	***	****	30≥ ±0.30	±2°
APPOVALS:	***	****	10~30 ±0.20	
			5~10 ±0.15	
			≤5 ±0.10	
		 东都电子 DONGDU ELECTRONICS		MODEL: CASSETTE PART NO: TP-0001 UNIT :mm SCALE:1:1 REV: A