ROHS

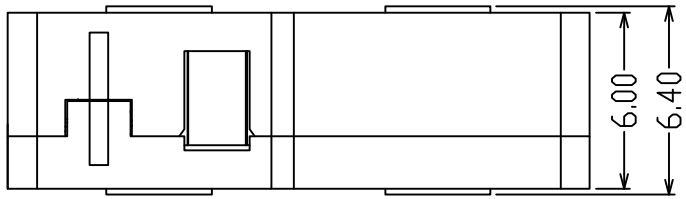

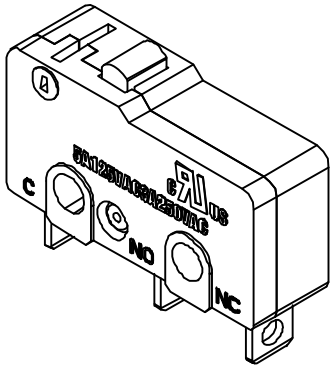

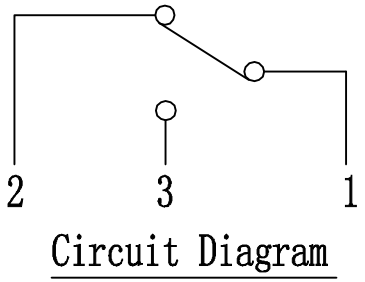

Circuit Diagram

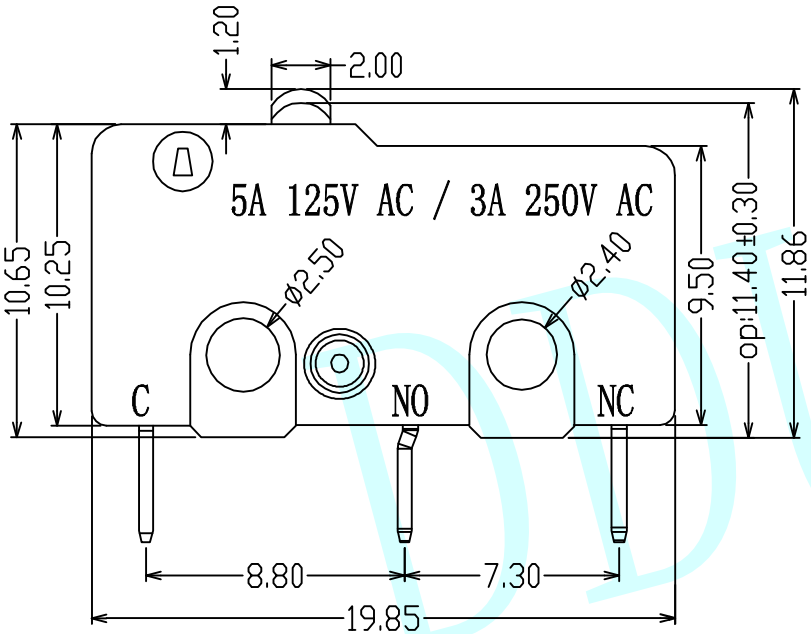

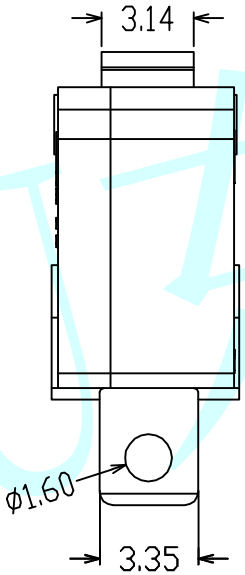

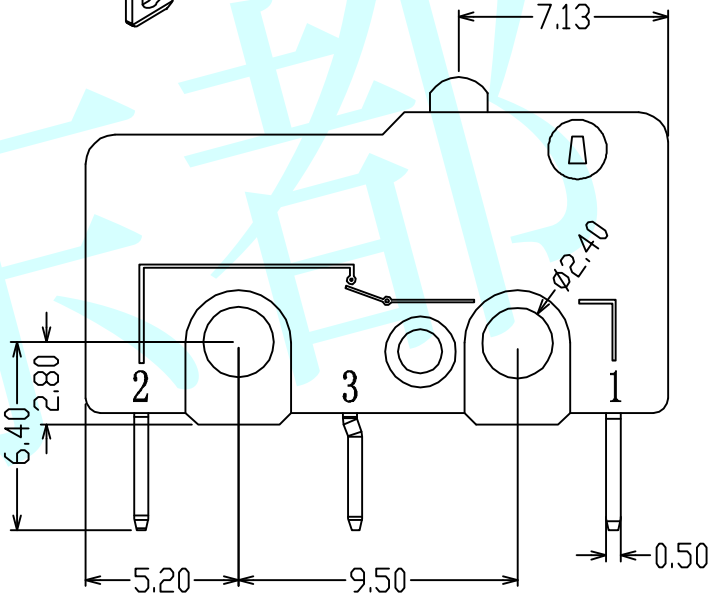

NOTE :

1. Rating :AC 3A 250V / 5A 125V
2. Insulation resistance:100MΩ min (500V DC)
3. Contact resistance:50mΩ max
4. Dielectric strength:15000V AC(50/60Hz) for 1 minute
5. Electrically life:100,000 cycles
6. Operating temperature rage:-25℃~+85℃

APPROVALS		DATE	http://www.dongdudz.com		
DRAW:	ZRD	2017-12-6	TOLERANCE:		ANGLE:
CHECKED:	***	****	30≥	±0.30	±2°
APPOVALS:	***	****	10~30	±0.20	
			5~10	±0.15	
			≤5	±0.10	

® 东都电子
DONGDU ELECTRONICS

MODEL:	MICRO SWITCHS	
PART NO:	DDU-1708	
UNIT :mm	SCALE:1:1	
REV:	A	PAGE:1/1